

FALKEN

PATTERN DIGEST 2020





True engineering that drives us forward
and moves us ahead of the times.

A youthful rhythm, full of passion
that turns people's heads.

The need to keep inspiring ourselves
— that's our heartbeat

Together we are FALKEN.

Forever we will be FALKEN.

We evoke this spirit in our
brand statement: On the pulse.

FALKEN PATTERN DIGEST 2020

CONTENTS

INTRODUCTION	3-6
PASSENGER CAR TIRES	7-19
4x4[4WD] & SUV TIRES	20-29
LIGHT TRUCK TIRES	30-33
TRUCK AND BUS TIRES	34-53
OE INFORMATION	54-55
SAFETY INFORMATION	56
CORPORATE DATA	57-58

FALKEN



KEN

INTRODUCTION


FALKEN offers a wide range of tires. This Pattern Digest is designed to help users apply these tires correctly. Inquiries and requests for additional information should be directed to the nearest FALKEN office or representatives. FALKEN tires conform to the following standards.

THE Japan Automobile Tyre Manufacturers Association, Inc. (JATMA)

The Tire and Rim Association, Inc. (TRA)

The European Tire and Rim Technical Organisation (ETRTO)

NEW TIRE DIMENSIONS

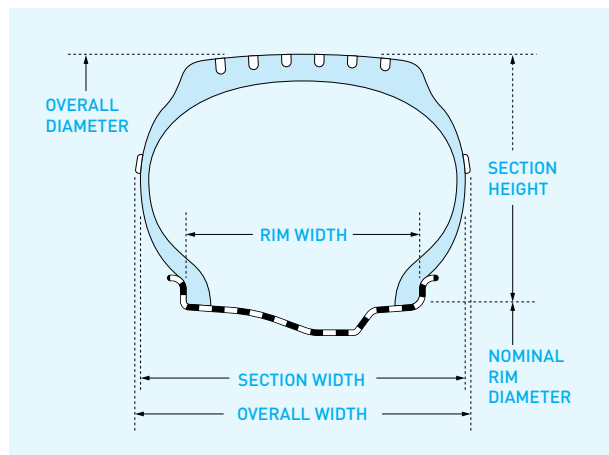

TIRE MEASUREMENT

Measurements should be taken for the mounted tire on its measuring rim at the recommended inflation pressure, with the tire allowed to stand for a minimum of 24 hours at normal temperature before readjustment of the pressure back to its original level.

SECTION WIDTH

Section width is the maximum width of the cross-section of inflated tires, excluding sidewall labeling (marking), decoration and protective bands or ribs.

SECTION HEIGHT

Section height is half the difference between the overall diameter and the nominal rim diameter.

OVERALL DIAMETER

Overall diameter is the diameter of the inflated new tire.

ASPECT RATIO

The aspect ratio is the percentage ratio of the section height to the section width of the tire on its theoretical rim.

PLY RATING

Ply Rating is the strength factor used to identify the load carrying capacity of a particular size of tire.

LOAD AND INFLATION PRESSURES

Tires are designed to carry a specific load which is related to inflation pressure.

In the interest of optimum performance, the correct load, and inflation pressure relativity should be maintained. The maximum load and inflation pressure specified for each tire should not be exceeded.

LOAD INDEX

The LOAD INDEX is a numerical code associated with the maximum load a tire can carry at the speed indicated by its Speed Symbol under service conditions specified by the tire manufacturer.

SPEED SYMBOL

The SPEED SYMBOL indicates the maximum speed at which the tire can carry a load corresponding to its Load Index under service conditions specified by the tire manufacturer.

TIRE SIZE DESIGNATION

(Example)

(1) 175/70R13 82S

175: Nominal section width in mm

70: Aspect Ratio

R: Radial construction

13: Rim diameter code

82: Load Index

S: Speed Symbol

(2) 31X10.50R15 6PR

31: Nominal overall diameter in inches

10.50: Nominal section width in inches

R: Radial construction

15: Rim diameter code

6: Ply Rating

(3) 315/80R22.5 154/149L

315: Nominal section width in mm

80: Aspect Ratio

22.5: Rim diameter code

154: Load index in single use

149: Load index in dual use

L: Speed Symbol

SPEED SYMBOL

Speed Symbol	Speed (km/h)
A1	5
A2	10
A3	15
A4	20
A5	25
A6	30
A7	35
A8	40
B	50
C	60
D	65
E	70
F	80
G	90
J	100
K	110
L	120
M	130
N	140
P	150
Q	160
R	170
S	180
T	190
U	200
H	210
V	240
W	270
Y	300
(Y)	above 300
Speed Category Marking	
ZR	above 240

LOAD INDEX

LI	kg	LI	kg	LI	kg	LI	kg	LI	kg	LI	kg	LI	kg	LI	kg
0	45	40	140	80	450	120	1,400	160	4,500	200	14,000	240	45,000		
1	46.2	41	145	81	462	121	1,450	161	4,625	201	14,500	241	46,250		
2	47.5	42	150	82	475	122	1,500	162	4,750	202	15,000	242	47,500		
3	48.7	43	155	83	487	123	1,550	163	4,875	203	15,500	243	48,750		
4	50	44	160	84	500	124	1,600	164	5,000	204	16,000	244	50,000		
5	51.5	45	165	85	515	125	1,650	165	5,150	205	16,500	245	51,500		
6	53	46	170	86	530	126	1,700	166	5,300	206	17,000	246	53,000		
7	54.5	47	175	87	545	127	1,750	167	5,450	207	17,500	247	54,500		
8	56	48	180	88	560	128	1,800	168	5,600	208	18,000	248	56,000		
9	58	49	185	89	580	129	1,850	169	5,800	209	18,500	249	58,000		
10	60	50	190	90	600	130	1,900	170	6,000	210	19,000	250	60,000		
11	61.5	51	195	91	615	131	1,950	171	6,150	211	19,500	251	61,500		
12	63	52	200	92	630	132	2,000	172	6,300	212	20,000	252	63,000		
13	65	53	206	93	650	133	2,060	173	6,500	213	20,600	253	65,000		
14	67	54	212	94	670	134	2,120	174	6,700	214	21,200	254	67,000		
15	69	55	218	95	690	135	2,180	175	6,900	215	21,800	255	69,000		
16	71	56	224	96	710	136	2,240	176	7,100	216	22,400	256	71,000		
17	73	57	230	97	730	137	2,300	177	7,300	217	23,000	257	73,000		
18	75	58	236	98	750	138	2,360	178	7,500	218	23,600	258	75,000		
19	77.5	59	243	99	775	139	2,430	179	7,750	219	24,300	259	77,500		
20	80	60	250	100	800	140	2,500	180	8,000	220	25,000	260	80,000		
21	82.5	61	257	101	825	141	2,575	181	8,250	221	25,750	261	82,500		
22	85	62	265	102	850	142	2,650	182	8,500	222	26,500	262	85,000		
23	87.5	63	272	103	875	143	2,725	183	8,750	223	27,250	263	87,500		
24	90	64	280	104	900	144	2,800	184	9,000	224	28,000	264	90,000		
25	92.5	65	290	105	925	145	2,900	185	9,250	225	29,000	265	92,500		
26	95	66	300	106	950	146	3,000	186	9,500	226	30,000	266	95,000		
27	97.5	67	307	107	975	147	3,075	187	9,750	227	30,750	267	97,500		
28	100	68	315	108	1,000	148	3,150	188	10,000	228	31,500	268	100,000		
29	103	69	325	109	1,030	149	3,250	189	10,300	229	32,500	269	103,000		
30	106	70	335	110	1,060	150	3,350	190	10,600	230	33,500	270	106,000		
31	109	71	345	111	1,090	151	3,450	191	10,900	231	34,500	271	109,000		
32	112	72	355	112	1,120	152	3,550	192	11,200	232	35,500	272	112,000		
33	115	73	365	113	1,150	153	3,650	193	11,500	233	36,500	273	115,000		
34	118	74	375	114	1,180	154	3,750	194	11,800	234	37,500	274	118,000		
35	121	75	387	115	1,215	155	3,875	195	12,150	235	38,750	275	121,500		
36	125	76	400	116	1,250	156	4,000	196	12,500	236	40,000	276	125,000		
37	128	77	412	117	1,285	157	4,125	197	12,850	237	41,250	277	128,500		
38	132	78	425	118	1,320	158	4,250	198	13,200	238	42,500	278	132,000		
39	136	79	437	119	1,360	159	4,375	199	13,600	239	43,750	279	136,000		

SEARCHING CLUE

Please refer to the following guidelines to find the tires you are looking for. For more details, separate guidelines are available in each category.

REMARKS					
WLT Raised White Letter 		OWL Outlined White Letter 		BLT Raised Black Letter 	
TT	Tube Type	E-No.	E Number	BLK	Black Sidewall
TL	Tubeless	RF	Reinforced	LI	Load Index
MFS	Maximum Flange Shield	WSL	White Slim Line	SS	Speed Symbol
				PR	Ply Rating
				XL	Extra Load

NOTICE: All the information in this booklet is subject to change with or without notice.

PASSENGER CAR TIRE CONVERSION CHART

(THIS CHART DOES NOT IMPLY COMPLETE INTERCHANGEABILITY)

70 SERIES 65-60-55-50-45-4-35 SERIES

Standard equipment size	Corresponding size					
	65SERIES	60SERIES	55SERIES	50SERIES	45SERIES	35SERIES
145/70R12	155/65R12 145/65R13	165/60R12 155/60R13 165/60R13	155/55R14			
155/70R12	155/65R13	165/60R13 175/60R13				
165/70R12	165/65R13	175/60R13 185/60R13 195/60R13	185/55R14			
175/70R12		185/60R13 195/60R13	185/55R14			
145/70R13	155/65R13 165/65R13	165/60R13 175/60R13 185/60R13	165/55R14	165/50R15		
155/70R13	165/65R13 155/65R14	175/60R13 185/60R13 195/60R13 165/60R14	185/55R14 165/55R15			
165/70R13	195/65R13 165/65R14 175/65R14	185/60R13 195/60R13 205/60R13 175/60R14 185/60R14	185/55R14 195/55R14 185/55R15	195/50R15	195/45R16	
175/70R13	195/65R13 175/65R14 185/65R14	195/60R13 205/60R13 185/60R14 195/60R14 185/60R15	195/55R14 185/55R15 195/55R15	195/50R15 205/50R15 215/50R15	205/45R16	
185/70R13	195/65R13 185/65R14 195/65R14	205/60R13 195/60R14 205/60R14 195/60R15	205/55R15	205/50R15 215/50R15 225/50R15 205/50R16	215/45R16	
165/70R14	175/65R14 185/65R14 165/65R15	185/60R14 195/60R14 205/60R14 175/60R15 185/60R15	195/55R14 185/55R15 195/55R15	195/50R15 205/50R15 215/50R15 195/50R16	205/45R16	
175/70R14	185/65R14 195/65R14 205/65R14 175/65R15 185/65R15	195/60R14 205/60R14 185/60R15 195/60R15 205/60R15 185/60R16	195/55R15 205/55R15 215/55R15 195/55R16	205/50R15 215/50R15 225/50R15 195/50R16 205/50R16 215/50R16	215/45R16 245/45R16 205/45R17	
185/70R14	195/65R14 205/65R14 215/65R14 185/65R15 195/65R15 205/65R15	205/60R14 195/60R15 205/60R15 215/60R15 195/60R16	205/55R15 215/55R15 205/55R16 215/55R16	215/50R15 225/50R15 215/50R16 225/50R16 205/50R17	245/45R16 225/45R17 255/40R17	
195/70R14	205/65R14 215/65R14 195/65R15 205/65R15 195/65R16	205/60R15 215/60R15 205/60R16	205/55R16 215/55R16 225/55R16	225/50R15 225/50R16 245/50R16 215/50R17	245/45R16 225/45R17 235/45R17 245/45R17	245/40R17 255/40R17
205/70R14	215/65R14 205/65R15 215/65R15 205/65R16	215/60R15 215/60R16	225/55R16 215/55R17	245/50R16 225/50R17 235/50R17	245/45R16 235/45R17 245/45R17	255/40R17
195/70R15	205/65R15 215/65R15 195/65R16 205/65R16	215/60R15 205/60R16 215/60R16 205/60R17	215/55R16 225/55R16 215/55R17 225/55R17	225/50R16 245/50R16 225/50R17 235/50R17	245/45R16 235/45R17 245/45R17 235/45R18	255/40R17 245/40R18
205/70R15	215/65R15 205/65R16 215/65R16	215/60R16 225/60R16 235/60R16 215/60R17	225/55R16 225/55R17	245/50R16 235/50R17 225/50R18 235/50R18	245/45R17 245/45R18	255/40R18
215/70R15	215/65R16 235/65R16	225/60R16 235/60R16 225/60R17	225/55R18	245/50R16 245/50R18		
225/70R15	235/65R16 225/65R17	235/60R16	235/55R18	245/50R18		
235/70R15	235/65R16 255/65R16					
255/70R15	255/65R16					
265/70R15	265/65R17	265/60R18				
205/70R16	215/65R16 235/65R16 225/65R17	225/60R16 235/60R16 225/60R17	225/55R18 225/55R18 235/55R18	235/50R18 245/50R18	245/45R19	285/35R19
215/70R16	235/65R16 225/65R17	235/60R16 225/60R17 225/60R18	235/55R18	245/50R18		285/35R19
225/70R16	235/65R16 255/65R16 225/65R17 235/65R18 225/65R18	235/60R18 245/60R18	255/55R18			
235/70R16	255/65R16	265/60R18	255/55R18			
245/70R16	255/65R16 265/65R17	265/60R18 245/60R19				
255/70R16	255/65R16 265/65R17 275/65R17	265/60R18 275/60R18				
265/70R16	265/65R17 275/65R17	275/60R18 285/60R18				
275/70R16	275/65R17	285/60R18				
215/70R17	225/65R17 235/65R17 225/65R18 235/65R18	235/60R18 245/60R18	255/55R18 235/55R19	245/50R20		
245/70R17	265/65R17 275/65R17	265/60R18 275/60R18 285/60R18		285/50R20		

65 SERIES 60-55-50-45-40-35 SERIES

Standard equipment size	Corresponding size					
	60SERIES	55SERIES	50SERIES	45SERIES	40SERIES	35SERIES
155/65R12	165/60R12					
145/65R13	155/60R13 165/60R13	155/55R14				
155/65R13	165/60R13 175/60R13		165/50R15			
165/65R13	175/60R13 185/60R13 195/60R13	185/55R14				
195/65R13	205/60R13					
145/65R14	165/60R14	165/55R14	165/50R15			
155/65R14	165/60R14 175/60R14	185/55R14 195/55R14 165/55R15 175/55R15				
165/65R14	175/60R14 185/60R14 195/60R14	185/55R14 195/55R14 185/55R15	195/50R15 205/50R15	195/45R16		
175/65R14	185/60R14 195/60R14 205/60R14 185/60R15	195/55R14 185/55R15 195/55R15	195/50R15 205/50R15 205/50R15 215/50R15	205/45R16		
185/65R14	195/60R14 205/60R14	205/55R15	205/50R15 215/50R15 225/50R15 205/50R16	215/45R16		
195/65R14	205/60R14 205/60R15	215/55R15	225/50R15 215/50R16			
205/65R14	205/60R15 215/60R15	205/55R16	225/50R15 225/50R16	245/45R16 225/45R17	245/40R17	
215/65R14	215/60R15			245/45R16 235/45R17	255/40R17	
145/65R15	155/60R15 165/60R15	165/55R15 175/55R15	165/50R15 195/50R15 165/50R16			
165/65R15	175/60R15 185/60R15	185/55R15 195/55R15 205/55R15 185/55R16	195/50R15 205/50R15 215/50R15 225/50R15 195/50R16	205/45R16 215/45R16	215/40R17	
175/65R15	185/60R15 195/60R15 205/60R15 185/60R16	195/55R15 205/55R15 215/55R15 195/55R16	205/50R15 215/50R15 225/50R15 205/50R16 215/50R16	215/45R16 205/45R17		
185/65R15	195/60R15 205/60R15 215/60R15 195/60R16	205/55R15 215/55R15 205/55R16	215/50R15 225/50R15 215/50R16 225/50R16 205/50R17	245/45R16 225/45R17	245/40R17	
195/65R15	205/60R15 215/60R15 205/60R16	205/55R16 215/55R16	225/50R15 225/50R16 245/50R16 215/50R17	245/45R16 225/45R17 235/45R17 245/45R17	245/40R17 255/40R17 235/40R18	
205/65R15	215/60R15 215/60R16	225/55R16	245/50R16 235/45R17 245/45R17			
215/65R15	225/60R16	225/55R17	245/50R16 235/45R17 245/45R18	245/45R18		
195/65R16	205/60R16 215/60R16 225/60R16	215/55R16 215/55R17	225/50R16 225/50R17 245/50R18	245/45R16 235/45R17 245/45R17	255/40R17 245/40R18	255/35R19
205/65R16	215/60R16 225/60R16 235/60R16 215/60R17	225/55R16 225/55R17	245/50R16 235/50R17 225/50R18 235/50R18	245/45R17 245/45R18	255/40R18 275/35R19	
215/65R16	225/60R16 235/60R16 225/60R17					
225/65R16	235/60R16 225/60R17					
235/65R16	245/60R16					
245/65R16	255/60R16					
255/65R16	265/60R16					
265/65R16	275/60R16					
275/65R16	285/60R16					
285/65R16	295/60R16					
295/65R16	305/60R16					
305/65R16	315/60R16					
315/65R16	325/60R16					
325/65R16	335/60R16					
335/65R16	345/60R16					
345/65R16	355/60R16					
355/65R16	365/60R16					
365/65R16	375/60R16					
375/65R16	385/60R16					
385/65R16	395/60R16					
395/65R16	405/60R16					
405/65R16	415/60R16					
415/65R16	425/60R16					
425/65R16	435/60R16					
435/65R16	445/60R16					
445/65R16	455/60R16					
455/65R16	465/60R16					
465/65R16	475/60R16					
475/65R16	485/60R16					
485/65R16	495/60R16					
495/65R16	505/60R16					
505/65R16	515/60R16					
515/65R16	525/60R16					
525/65R16	535/60R16					
535/65R16	545/60R16					
545/65R16	555/60R16					
555/65R16	565/60R16					
565/65R16	575/60R16					
575/65R16	585/60R16					
585/65R16	595/60R16					
595/65R16	605/60R16					
605/65R16	615/60R16					
615/65R16	625/60R16					
625/65R16	635/60R16					
635/65R16	645/60R16					
645/65R16	655/60R16					
655/65R16	665/60R16					
665/65R16	675/60R16					
675/65R16	685/60R16					
685/65R16	695/60R16					
695/65R16	705/60R16					
705/65R16	715/60R16					
715/65R16	725/60R16					
725/65R16	735/60R16					
735/65R16	745/60R16					
745/65R16	755/60R16					
755/65R16	765/60R16					
765/65R16	775/60R16					
775/65R16	785/60R16					
785/65R16	795/60R16					
795/65R16	805/60R16					
805/65R16	815/60R16					
815/65R16	825/60R16					
825/65R16	835/60R16					
835/65R16	845/60R16					
845/65R16	855/60R16					
855/65R16	865/60R16					
865/65R16	875/60R16					
875/65R16	885/60R16					
885/65R16	895/60R16					
895/65R16	905/60R16					
905/65R16	915/60R16					
915/65R16	925/60R16					
925/65R16	935/60R16					
935/65R16	945/60R16					
945/65R16	955/60R16					
955/65R16	965/60R16					
965/65R16	975/60R16					
975/65R16	985/60R16					
985/65R16	995/60R16					
995/65R16	1005/60R16					

NOTE: This chart is based only on the overall diameter of the tire.

• Load index (LI) must be equal or higher than original one when tire replacement to another size.

example 195/60R15 88H→195/55R16 87V Not recommended

• Tire clearance between the body and suspension varies with each vehicle, and or due to modifications and different wheel offsets. The above chart is not meant to indicate that the sizes listed above can actually be mounted on vehicles.

60 SERIES 55-50-45-40-35-30 SERIES

Standard equipment size	Corresponding size					
	55SERIES	50SERIES	45SERIES	40SERIES	35SERIES	30SERIES
185/60R13	185/55R14					
165/60R14	185/55R14 195/55R14 165/55R15 175/55R15					
175/60R14	185/55R14 195/55R14	195/50R15				
185/60R14	195/55R14 185/55R15	195/50R15 205/50R15	205/45R16			
195/60R14		205/50R15 215/50R15	215/45R16			
205/60R14	215/55R15	225/50R15				
155/60R15	165/55R15 175/55R15	195/50R15 165/50R16				
165/60R15	175/55R15 185/55R15	195/50R15 205/50R15	195/45R16 205/45R16			
175/60R15	185/55R15 195/55R15 205/55R15 185/55R16	195/50R15 205/50R15 215/50R15 225/50R15 195/50R16	205/45R16 215/45R16	215/40R17		
185/60R15	195/55R15 205/55R15 215/55R15 195/55R16	205/50R15 215/50R15 225/50R15 195/50R16 205/50R16	215/45R16			
195/60R15	205/55R15 215/55R15 205/55R16	215/50R15 225/50R15 215/50R16 225/50R16	245/45R16	245/40R17		
205/60R15	205/55R16 215/55R16	225/50R15 225/50R16	245/45R16 225/45R17	245/40R17		
215/60R15	225/55R16	245/50R16 235/45R17 245/45R17				
175/60R16	185/55R16 195/55R16 205/55R16	195/50R16 205/50R16 215/50R16 225/50R16	205/45R16 215/45R16 245/45R16 205/45R17	215/40R17 245/40R17		
185/60R16	195/55R16 205/55R16 215/55R16	205/50R16 215/50R16 225/50R16 205/50R17	215/45R16 245/45R16 215/45R17 225/45R17	245/40R17 255/40R17	255/35R18	
195/60R16	205/55R16 215/55R16 225/55R16	215/50R16 225/50R16 245/50R16 205/50R17 215/50R17	245/45R16 225/45R17 235/45R17 245/45R17	245/40R17 255/40R17 235/40R18	255/35R18	
205/60R16	215/55R16 225/55R16 215/55R17	225/50R16 245/50R16 225/50R17 235/50R17	245/45R16 235/45R17 245/45R17	255/40R17 245/40R18		
215/60R16	225/55R16 225/55R17	245/50R16 235/50R17 225/50R18	245/45R17 245/45R18	255/40R18	275/35R19	
225/60R16		245/50R16			285/35R19	
235/60R16		245/50R18				
205/60R17	215/55R17 225/55R17 215/55R18	225/50R17 235/50R17 225/50R18 235/50R18	235/45R17 245/45R17 235/45R18 245/45R18	255/40R18 245/40R19	275/35R19 285/35R19	295/30R20
215/60R17	225/55R17 225/55R18	235/50R17 235/50R18 245/50R18	245/45R17 245/45R18 255/45R18	255/40R19	275/35R19 285/35R19	295/30R20 305/30R20
225/60R17	235/55R18	245/50R18			285/35R19 285/35R20	305/30R20
225/60R18	235/55R18 255/55R18 235/55R19	245/50R18				
235/60R18	255/55R18					
245/60R18	255/55R18					
265/60R18		285/50R20				
275/60R18		285/50R20				
245/60R19		285/50R20				

55 SERIES 50-45-40-35-30 SERIES

Standard equipment size	Corresponding size				
	50SERIES	45SERIES	40SERIES	35SERIES	30SERIES
165/55R14	165/50R15				
195/55R14	195/50R15 205/50R15				
165/55R15	195/50R15 165/50R16				
175/55R15	195/50R15 205/50R15	195/45R16			
185/55R15	195/50R15 205/50R15 215/50R15 195/50R16	205/45R16			
195/55R15	205/50R15 215/50R15 225/50R15 195/50R16 205/50R16	215/45R16			
205/55R15	215/50R15 225/50R15 205/50R16 215/50R16	245/45R16			
215/55R15	225/50R15 215/50R16 225/50R16	245/45R16	245/40R17		
185/55R16	195/50R16 205/50R16 215/50R16	205/45R16 215/45R16 245/45R16 205/45R17	215/40R17		
195/55R16	205/50R16 215/50R16 225/50R16 205/50R17	215/45R16 245/45R16 215/45R17	245/40R17		
205/55R16	215/50R16 225/50R16 245/50R16 205/50R17 215/50R17	245/45R16 225/45R17 235/45R17	245/40R17 255/40R17 235/40R18	255/35R18	
215/55R16	225/50R16 245/50R16 215/50R17 225/50R17	245/45R16 245/45R16 245/45R17 245/45R17	245/40R17 255/40R17 235/40R18		
225/55R16	245/50R16 225/50R17 235/50R17	245/45R16 235/45R17 245/45R17	255/40R17 255/40R18		
205/55R17	215/50R17 225/50R17 235/50R17	225/45R17 235/45R17 245/45R17	245/40R17 255/40R17 235/40R18 245/40R18 255/40R18	255/35R19	
215/55R17	225/50R17 235/50R17 225/50R18	235/45R17 245/45R17 235/45R18 245/45R18	255/40R17 245/40R18 255/40R18	275/35R19	
225/55R17	235/50R17 225/50R18 235/50R18	245/45R17 245/45R18 245/45R18	255/40R18 255/40R19 285/35R19	275/35R19 285/35R19	295/30R20
205/55R18	225/50R18 235/50R18 245/50R18	225/45R18 235/45R18 245/45R18 225/45R19	235/40R18 245/40R18 255/35R19 255/35R20 265/35R20	255/35R19 275/35R19 285/35R19	295/30R20 305/30R20
215/55R18	225/50R18 235/50R18 245/50R18	235/45R18 245/45R18 245/45R19	255/40R18 245/40R19 255/40R19 245/40R20	275/35R19 285/35R19 265/35R20	295/30R20 305/30R20
225/55R18	235/50R18 245/50R18	245/45R18 245/45R19	255/40R20 285/35R19 285/35R20 285/35R20	295/30R20 305/30R20	
235/55R18	245/50R18				
235/55R19	245/50R20				
235/55R20	245/50R20				

50 SERIES 45-40-35-30 SERIES

Standard equipment size	Corresponding size				
	45SERIES	40SERIES	35SERIES	30SERIES	
195/50R15	205/45R16				
205/50R15	215/45R16				
225/50R15	245/45R16				
165/50R16	195/45R16				
195/50R16	215/45R16 205/45R17				
205/50R16	245/45R16				
215/50R16	245/45R16 225/45R17	245/40R17	255/35R18		
225/50R16	245/45R16 235/45R17	255/40R17			
205/50R17	225/45R17 235/45R17 245/45R17	245/40R17 255/40R17 235/40R18	255/35R18		
215/50R17	225/45R17 235/45R17 245/45R17 225/45R18	245/40R17 255/40R17 235/40R18 245/40R18			
225/50R17	235/45R17 245/45R17 235/45R18 245/45R18	255/40R17 255/40R18	275/35R19		
235/50R17	245/45R18		275/35R19		
225/50R18	245/45R18	255/40R18 255/40R19	275/35R19 285/35R19 265/35R20	295/30R20 305/30R20	
235/50R18	245/45R19		285/35R19	295/30R20 305/30R20	
245/50R18			285/35R20		

45 SERIES 40-35-30 SERIES

Standard equipment size	Corresponding size		
	40SERIES	35SERIES	30SERIES
195/45R16	205/40R17		
205/45R16	215/40R17		
245/45R16	255/40R17		
195/45R17	215/40R17		
205/45R17	245/40R17 255/40R17 215/40R18		
215/45R17	245/40R17 255/40R17 225/40R18 235/40R18	255/35R18	
225/45R17	245/40R17 255/40R17 235/40R18	255/35R18	
235/45R17	255/40R17 245/40R18 255/40R18		
245/45R17	255/40R18		
215/45R18	235/40R18 245/40R18 255/40R18 225/40R19	255/35R18 255/35R19	
225/45R18	235/40R18 245/40R18 255/40R18	255/35R19 275/35R19	
235/45R18	255/40R18 245/40R19 255/40R19	275/35R19 285/35R19	295/30R20
245/45R18	255/40R19 285/35R19 255/40R20	295/30R20 305/30R20	
225/45R19	245/40R19 255/40R19 245/40R20	275/35R19 285/35R19 265/35R20	295/30R20 305/30R20
245/45R19		285/35R19 285/35R20	305/30R20

40 SERIES 35-30 SERIES

Standard equipment size	Corresponding size	
	35SERIES	30SERIES
215/40R18	255/35R18	
225/40R18	255/35R18	
235/40R18	255/35R19	
245/40R18	275/35R19	
255/40R18	275/35R19	
225/40R19	255/35R19 275/35R19 285/35R19	
245/40R19	275/35R19 285/35R19 265/35R20	295/30R20 305/30R20
255/40R19	275/35R19 285/35R19 285/35R20	295/30R20 305/30R20
245/40R20	265/35R20 285/35R20	295/30R20 305/30R20
255/40R20	285/35R20	295/30R20 305/30R20

35 SERIES 30 SERIES

Standard equipment size	30SERIES
275/35R19	295/30R20 305/30R20
285/35R19	305/30R20
255/35R20	295/30R20 305/30R20
265/35R20	295/30R20 305/30R20



Sample image

PASSENGER CAR TIRES



Passenger
Car



4x4 (4WD) &
SUV



Light Truck



Truck



Bus

FALKEN

PASSENGER CAR TIRES

SAFETY WARNING

SERIOUS INJURY OR DEATH MAY RESULT FROM EXPLOSION OF TIRE/RIM ASSEMBLY IF PROPER MOUNTING INSTRUCTIONS ARE NOT FOLLOWED.

- ***ONLY** specially trained persons should mount tires.
- ***ALWAYS** match rim diameter with appropriate tire size.
- ***NEVER** mount a tire on a cracked, bent, rusted or otherwise damaged rim or a rim which has been repaired.
- ***NEVER** put a flammable substance into a tire.
- ***ALWAYS** clean and lubricate the rim and tire beads.
- ***ALWAYS** use an extension air hose with gauge and clip-on air chuck.
- ***ALWAYS** lock the wheel on the tire mounting machine, or place it in a safety cage when inflating.
- ***ALWAYS** stand clear, and **NEVER** lean or reach over the tire/rim assembly when inflating.
- ***NEVER** inflate over 40 psi (275 kPa) to seat beads.
- ***ALWAYS** adjust tire pressure to the vehicle manufacturer's recommendations after beads are fully seated.

CHARACTERISTICS OF PATTERNS

Sporty, High Speed	FK510	FK453	RT615K+
Sporty and Comfort	ZE914 ECORUN		
Comfort	SN828	SN832i	SN832 ECORUN



Series

25/30/35/40/45

SERIES	SIZE		LI		FK510	FK453	FK452	PT722 A/S	ZE912	ZE914EC	SN832i	SN832EC	SN828	RT615K+
			St'd	Reinf										
25	285/25	R20	-	93		ZR 93Y								
	295/25	R20	-	95		ZR(95Y)								
	305/25	R20	93	97			ZR 97Y							
	295/25	R21	-	96			ZR 96Y							
	285/25	R22	-	95			ZR 95Y							
30	295/30	R18	94	98		ZR 97Y								
	315/30	R18	98	-		ZR 98Y								
	245/30	R19	-	89		ZR 89Y								
	255/30	R19	-	91	ZR(91Y)	ZR 91Y,W								
	265/30	R19	89	93	ZR(93Y)	ZR(93Y),ZR 93W	ZR 93Y							
	275/30	R19	92	96	ZR(96Y)	ZR(96Y),ZR 96W	ZR 96Y	ZR 96W						
	285/30	R19	94	98		ZR 98Y								
	295/30	R19	96	100	ZR 100Y	ZR(100Y),ZR 100W								
	305/30	R19	98	102		ZR(102Y)								
	225/30	R20	-	85		ZR 85Y	ZR 85Y							
	235/30	R20	-	88		ZR(88Y)	ZR 88Y							
	245/30	R20	86	90	ZR(90Y)	ZR(90Y)	ZR 90Y							
	255/30	R20	88	92	ZR(92Y)	ZR 92Y	ZR 92Y							
	275/30	R20	93	97	ZR(97Y)	ZR 97Y,ZR 97W	ZR 97Y	ZR 97W						
	285/30	R20	95	99	ZR(99Y)	ZR 99Y,W	ZR 99Y							
	255/30	R21	-	93			ZR 93Y							
	245/30	R22	-	92		ZR 92Y	ZR 92Y							
	255/30	R22	-	95		ZR 95Y	ZR 95Y							
	265/30	R22	93	97										
35	215/35	R17	79	83			ZR 97Y							
	225/35	R17	82	86			ZR(83)							
	215/35	R18	80	84		ZR 84Y	ZR 86Y							
	225/35	R18	83	87	ZR(87Y)	ZR 87Y	ZR(84)	ZR 84W						
	235/35	R18	84	90			ZR 88Y	ZR 90W						
	245/35	R18	88	92	ZR 92Y	ZR 92Y, W	ZR 88Y							
	255/35	R18	90	94	ZR(94Y)	ZR 94Y, W		ZR 94Y	ZR 94W	90W				
	265/35	R18	93	97	ZR(97Y)	ZR(97Y),ZR 97W	ZR 97Y		ZR 97W	97W				97W
	275/35	R18	95	99	ZR(99Y)	ZR 99Y,ZR 99W	ZR 95Y							
	285/35	R18	97	101	ZR(101Y)	ZR 101Y,W	ZR 97Y							
	215/35	R19	-	85		ZR 85Y	ZR(85)							
	225/35	R19	84	88	ZR(88Y)	ZR 88Y	ZR 88Y							
	235/35	R19	87	91	ZR(91Y)	ZR(91Y),ZR 91W	ZR 91Y	91W						
	245/35	R19	89	93	ZR(93Y)	ZR(93Y),ZR 93W	ZR 93Y	ZR 93W						
	255/35	R19	92	96	ZR(96Y)	RF 92Y,ZR(96Y)	ZR 96Y	ZR 96Y						
	265/35	R19	94	98	ZR(98Y)	ZR 98Y								
	275/35	R19	96	100		RF 96Y,ZR(100Y),ZR 100W	ZR 96Y							
	285/35	R19	99	103		ZR(99Y)	ZR 99Y							
	225/35	R20	-	90			ZR 90Y							
	245/35	R20	91	95	ZR(95Y)	ZR 95Y,W	ZR 95Y	95W						
	255/35	R20	93	97	ZR(97Y)	ZR 97Y	ZR 97Y	ZR 97W						
	275/35	R20	98	102	ZR(102Y)	ZR 102Y,W	ZR 102Y	ZR 102W						
	315/35	R20	106	110										
	285/35	R22	102	106										
40	195/40	R16	-	80					80V	80V				
	205/40	R16	-	83					83H					83W
	215/40	R16	82	86			ZR 86Y		86W					
	225/40	R16	85	-					85W					
	195/40	R17	-	81					81W	81W				
	205/40	R17	80	84		ZR 84W	ZR(84)		ZR 84W	84W				
	215/40	R17	83	87			ZR(87)		ZR 87W	87W				87W
	235/40	R17	90	94		ZR 94Y	ZR 90Y							90W
	245/40	R17	91	95	ZR 95Y	ZR 95Y, W	ZR 95Y	ZR 91W	91W					
	255/40	R17	94	98		ZR 98Y,W	ZR 94Y	ZR 94W						94W
	265/40	R17	96	100		ZR 100Y	ZR 96Y							
	275/40	R17	98	-		ZR 98Y	ZR 98Y							
	205/40	R18	82	86						86W				
	215/40	R18	85	89		ZR 89Y	ZR 89Y		ZR 89W	89W				
	225/40	R18	88	92	ZR(92Y)	ZR 92Y	ZR 92Y	ZR 92W	92W					92W
	235/40	R18	91	95	ZR(95Y)	ZR(95Y),ZR 95W	ZR 95Y	95V	ZR 95W	95W				95W
	245/40	R18	93	97	ZR(97Y)	ZR(97Y),ZR 97W	ZR 97Y		ZR 97W	97W				97W
	255/40	R18	95	99	ZR(99Y)	RF 95Y,ZR(99Y)								
	265/40	R18	97	101		ZR(101Y)								
	275/40	R18	99	103	ZR 99Y	RF 99Y,ZR 99Y,W								
	295/40	R18	103	-										103W
	225/40	R19	89	93	ZR(93Y)	RF 89Y,ZR 93Y								
	235/40	R19	92	96	ZR(96Y)	ZR 96Y								
	245/40	R19	94	98	ZR(98Y)	RF 94Y,ZR 98Y,W	ZR 98Y							
	255/40	R19	96	100	ZR(100Y)	ZR 100Y	ZR 100Y	ZR 100Y						
	275/40	R19	101	105	ZR(105Y)	ZR 101Y,W	ZR 101Y	ZR 101W						
	245/40	R20	95	99	ZR(99Y)	ZR 99Y,W	ZR 99Y							
	275/40	R20	102	106		ZR 106Y		ZR 106Y						
	295/40	R20	106	110										
45	195/45	R14	77	-					77V					
	195/45	R15	78	-					78V					
	195/45	R16	80	84					84V					
	205/45	R16	83	87					87V					
	215/45	R16	86	90					86V					86W
	225/45	R16	89	93			ZR 89Y							
	195/45	R17	81	85					85W	85W				
	205/45	R17	84	88					88W,RF 84W	91W				
	215/45	R17	87	91	ZR 91Y	ZR 91Y,W	ZR 87Y	91V	ZR 91W	94W,RF 91W				87W
	225/45	R17	91	94	ZR 94Y	ZR 94Y,W	ZR 94Y		ZR 94W	94W				94W
	235/45	R17	94	97	ZR 97Y	ZR 97Y, W	ZR 94Y	94V	ZR 94W	94W				
	245/45	R17	95	99	ZR 99Y	ZR 99Y	ZR 95Y	95V	ZR 95W	95W				99W
	255/45	R17	98	102			ZR 98Y							
	215/45	R18	89	93		ZR 93Y,W			ZR 93W	93W				
	225/45	R18	91	95	ZR(95Y)	RF 91Y,ZR 95Y, W	ZR 95Y		ZR 91W	95W				
	235/45	R18	94	98	ZR(98Y)	ZR 98Y, W			ZR 94W					
	245/45	R18	96	100	ZR(100Y)	RF 96Y,ZR 100Y,W	ZR 100Y	100V	ZR 100W	100W				
	255/45	R18	99	103	ZR 103Y	ZR 103Y	ZR 103Y	99V						
	225/45	R19	92	96	ZR 96Y	ZR 96Y, W								
	235/45	R19	95	99	ZR 99Y									
	245/45	R19	98	102	ZR(102Y)	ZR 102Y,W	ZR 98Y	ZR 98W	104Y					
	255/45	ZR19												
	275/45	R19	104	108										
	285/45	R19	107	111										
	245/45	R20	99	103	ZR 103Y	ZR 103Y	ZR 99W	ZR 99W						
	255/45	R20	101	105	ZR 105Y	ZR 105Y,W	ZR 105Y	ZR 105Y						
	275/45	R20	106	110										

Series	Size	LI		FK510	FK453	FK452	PT722 A/S	ZE912	ZE914EC	SN832i	SN832EC	SN828	RT615K+
		St'd	Reinf										
50	165/50 R15	72	76							72H			
	175/50 R15	75	-						75H				
	195/50 R15	82	86					82H,V	82V	82H			
	205/50 R15	86	89					86H,V	86V				89W
	225/50 R15	91	95					91V					
	185/50 R16	81	-						81V				
	195/50 R16	84	88					84V	88V	84H			
	205/50 R16	87	91			ZR 87W		87V	87V	87H			
	215/50 R16	90	94					90V					
	225/50 R16	92	96			ZR 92W	92V	96V	96W				92W
	245/50 R16	97	-					97H					
	205/50 R17	89	93					ZR 93W	93W				
	215/50 R17	91	95					91V	91V				
	225/50 R17	94	98					94V,W	94W,RF 94W				
	235/50 R17	96	100					ZR 96W	96W				
	225/50 R18	95	99					95V					
	235/50 R18	97	101					ZR 101W	101W				
	245/50 R18	100	104										
	255/50 R19	103	107										
	265/50 R19	106	110										
	245/50 R20							102V					
	255/50 R20	105	109										
55	165/55 R14	72	-					72V		72T			
	185/55 R14	80	-					80H					
	165/55 R15	75	-					75V					
	175/55 R15	77	-										
	185/55 R15	82	86					82V	82H,86V	82H			
	195/55 R15	85	89					85V	85H,V	85H			
	205/55 R15	88	-					88V	88V				
	185/55 R16	83	87					83V					
	195/55 R16	87	91					87V	87V,RF 87W	87H			
	205/55 R16	91	94			ZR 91W	91V	91V	91V,W,RF 91W	91H			
	215/55 R16	93	97			ZR 93W	97V	97V	93V,W,97W				
	225/55 R16	95	99			ZR 95W	95V	95V	95V,99W				
	205/55 R17	91	95						91V,RF 91W				
	215/55 R17	94	98					94V	ZR 94W				
	225/55 R17	97	101					97V	ZR 101W				
	235/55 R17	99	103					99V	ZR 99W				
	245/55 R17	102	106										
	215/55 R18	95	99					95V	95H	95H			
	225/55 R18	98	102						98H	98H			
	235/55 R18								100V	100V			
	245/55 ZR18	100	104										
	255/55 R18	105	109						109V	109V			
	225/55 R19	99	103										
	235/55 R19	101	105										
	245/55 R19	-	-										
	255/55 R19	107	111										
60	165/60 R12	71	-					71H	71H				
	165/60 R13	73	-										
	175/60 R13	77	-					77H					
	185/60 R13	80	-					80H					
	205/60 R13	86	-					86H					
	165/60 R14	75	79					75H	75H	75T	79T		
	175/60 R14	79	83					79H	79H				
	185/60 R14	82	86					82H	82H	82H	82T		
	195/60 R14	86	-					86H					86H
	205/60 R14	88	-					88H					
	155/60 R15	74	-										
	165/60 R15	77	81										
	175/60 R15	81	-										
	185/60 R15	84	88					81H	81H				
	195/60 R15	88	92					84H,88H	84H,88H	84H	84T		
	205/60 R15	91	95					88H,V	88H,V	88H			
	215/60 R15	94	98					91H,V	91H,V	91H			
	225/60 R15	96	-					94H					
	195/60 R16	89	93					96H,W	96W				
	205/60 R16	92	96						89V				
	215/60 R16	95	99					92H	92H,96V	92H			
	225/60 R16	98	102					99H	99H,95V	95H			
	235/60 R16	100	104					98H,W					
	215/60 R17	96	100					ZR 100W	100W				
	225/60 R17	99	103					96H	96H				
	235/60 R17	102	106					99H	99H,V				
	255/60 R17	106	110					102H	102H				
	225/60 R18	100	104					106H					
	235/60 R18	103	107					100H	100H				
	245/60 R18	105	109					107V	107V				
	255/60 R18	108	112					105H					
	265/60 R18	110	114					112V					
	255/60 R19	109	113					110V	110V				
								108H					
65	155/65 R13	73	-										
	165/65 R13	77	-							77T			
	175/65 R13	80	-										
	155/65 R14	75	79										
	165/65 R14	79	83										
	175/65 R14	82	86										
	185/65 R14	86	90					82H	82H	79T	75T	73T	
	195/65 R14	89	93					86H	86H	82T	82T	82T,86T	
	145/65 R15	72	-					89H		86H	86T	86T	
	165/65 R15	81	-										
	175/65 R15	84	88										
	185/65 R15	88	92										
	195/65 R15	91	95										
	205/65 R15	94	99										
	215/65 R15	96	100										
	205/65 R16	95	99										
	215/65 R16	98	102										
	225/65 R16	100	104										
	235/65 R16	103	107										
	225/65 R17	102	106										
	235/65 R17	104	108										
	235/65 R18	106	110										
	255/65 R18	111	115										
70	165/70 R10	-	-										
	145/70 R12	69	-										
	155/70 R12	73	-										
	165/70 R12	77	-										
	145/70 R13	71	-										
	155/70 R13	75	-										
	165/70 R13	79	83										
	175/70 R13	82	86										
	185/70 R13	86	91										
	165/70 R14	81	85										
	175/70 R14	84	88										
	185/70 R14	88	92										
	195/70 R14	91	95										
	205/70 R14	-	98										
	205/70 R15	96	100										
	215/70 R15	98	103										
	205/70 R16	97	-										
	145/80 R10	69	-										
	145/80 R12	-	77										
	155/80 R12	77	-										
	145/80 R13	75	79										
	155/80 R13	79	83										
	165/80 R13	83	87										
	175/80 R14	88	92										
80	145/80 R10	69	-										
	145/80 R12	-	77										
	155/80 R12	77	-										
	145/80 R13	75	79										
	155/80 R13	79	83										
	165/80 R13	83	87										

AZENIS FK510



- Falken's latest generation most high performance summer tire, the AZENIS FK510 is designed for drivers of premium vehicles looking for excellent grip and outstanding performance.
- 4D Nano Design enables Falken engineers to optimize new high-performance compounds at the molecular level, enhancing both wear and wet weather traction.
- Featuring hybrid undertread materials, the FK510 delivers handling and stability.

AZENIS FK510

Rim (inch)	Aspect ratio (%)	Tire Size	Load Index	Speed Symbol	XL or RF	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
22	25	295 /25 ZR 22	97	Y	○	TL		707	306	10.50	10.00 - 11.00	7.3
	30	255 /30 ZR 21 (93)	(93)	(Y)	○	TL	○	687	263	9.00	8.50 - 9.50	7.7
21	30	295 /30 ZR 21 (102)	(102)	(Y)	○	TL	○	713	306	10.50	10.00 - 11.00	7.3
	35	225 /35 ZR 21 (90)	(90)	(Y)	○	TL	○	666	232	8.00	7.50 - 9.00	7.8
		235 /35 ZR 21 (92)	(92)	(Y)	○	TL	○	672	244	8.50	8.00 - 9.50	7.8
		245 /35 ZR 21 (96)	(96)	(Y)	○	TL	○	705	251	8.50	8.00 - 9.50	7.8
		265 /35 ZR 21 (101)	(101)	(Y)	○	TL		721	275	9.50	9.00 - 10.50	7.6
20	25	285 /25 ZR 20 93	93	Y	○	TL	○	650	300	10.50	10.50 - 10.50	7.3
		295 /25 ZR 20 (95)	(95)	(Y)	○	TL	○	656	306	10.50	10.00 - 11.00	7.3
	30	235 /30 ZR 20 (88)	(88)	(Y)	○	TL	○	650	244	8.50	8.50 - 8.50	7.7
		245 /30 ZR 20 (90)	(90)	(Y)	○	TL	○	656	251	8.50	8.00 - 9.00	7.8
		255 /30 ZR 20 (92)	(92)	(Y)	○	TL	○	662	263	9.00	8.50 - 9.50	7.7
		265 /30 ZR 20 (94)	(94)	(Y)	○	TL	○	668	275	9.50	9.00 - 10.00	7.5
		275 /30 ZR 20 (97)	(97)	(Y)	○	TL	○	674	282	9.50	9.00 - 10.00	7.5
		285 /30 ZR 20 (99)	(99)	(Y)	○	TL	○	680	295	10.00	9.50 - 10.50	7.3
		295 /30 ZR 20 (101)	(101)	(Y)	○	TL		688	306	10.50	10.00 - 11.00	7.3
	35	225 /35 ZR 20 (90)	(90)	(Y)	○	TL	○	666	232	8.00	7.50 - 9.00	7.8
		235 /35 ZR 20 (92)	(92)	(Y)	○	TL	○	672	244	8.50	8.00 - 9.50	7.8
		245 /35 ZR 20 (95)	(95)	(Y)	○	TL	○	680	251	8.50	8.00 - 9.50	7.8
		255 /35 ZR 20 (97)	(97)	(Y)	○	TL	○	688	263	9.00	8.50 - 10.00	7.8
		265 /35 ZR 20 (99)	(99)	(Y)	○	TL	○	696	275	9.50	9.00 - 10.50	7.7
		275 /35 ZR 20 (102)	(102)	(Y)	○	TL	○	702	282	9.50	9.00 - 11.00	7.6
		285 /35 ZR 20 (104)	(104)	(Y)	○	TL		710	295	10.00	9.50 - 11.00	7.4
		315 /35 ZR 20 110	110	Y	○	TL		730	326	11.00	10.50 - 12.50	7.2
	40	245 /40 ZR 20 (99)	(99)	(Y)	○	TL	○	706	251	8.50	8.00 - 9.50	7.9
		255 /40 ZR 20 (101)	(101)	(Y)	○	TL		714	263	9.00	8.50 - 10.00	7.9
		265 /40 ZR 20 104	104	Y	○	TL		722	275	9.50	9.00 - 10.50	7.7
		275 /40 ZR 20 (106)	(106)	(Y)	○	TL		730	282	9.50	9.00 - 11.00	7.7
	45	245 /45 ZR 20 103	103	Y	○	TL	○	730	246	8.00	7.50 - 9.00	7.9
		255 /45 ZR 20 105	105	Y	○	TL		742	258	8.50	8.00 - 9.50	7.9
	50	255 /50 ZR 20 109	109	Y	○	TL	○	768	269	8.00	7.00 - 9.00	7.9
19	30	245 /30 ZR 19 (89)	(89)	(Y)	○	TL	○	631	251	8.50	8.00 - 9.00	7.7
		255 /30 ZR 19 (91)	(91)	(Y)	○	TL	○	637	263	9.00	8.50 - 9.50	7.7
		265 /30 ZR 19 (93)	(93)	(Y)	○	TL	○	643	275	9.50	9.00 - 10.00	7.5
		275 /30 ZR 19 (96)	(96)	(Y)	○	TL	○	649	282	9.50	9.00 - 10.00	7.5
		285 /30 ZR 19 (98)	(98)	(Y)	○	TL	○	655	295	10.00	9.50 - 10.50	7.3
		295 /30 ZR 19 100	100	Y	○	TL		663	306	10.50	10.00 - 11.00	7.5
	35	215 /35 ZR 19 85	85	Y	○	TL	○	633	220	7.50	7.00 - 8.50	7.8
		225 /35 ZR 19 (88)	(88)	(Y)	○	TL	○	641	232	8.00	7.50 - 9.00	7.8
		235 /35 ZR 19 (91)	(91)	(Y)	○	TL	○	647	244	8.50	8.00 - 9.50	7.9
		245 /35 ZR 19 (93)	(93)	(Y)	○	TL	○	655	251	8.50	8.00 - 9.50	7.8
		255 /35 ZR 19 (96)	(96)	(Y)	○	TL	○	663	263	9.00	8.50 - 10.00	7.8
		265 /35 ZR 19 (98)	(98)	(Y)	○	TL	○	671	275	9.50	9.00 - 10.50	7.6
		275 /35 ZR 19 (100)	(100)	(Y)	○	TL	○	677	282	9.50	9.00 - 11.00	7.6
		285 /35 ZR 19 (103)	(103)	(Y)	○	TL		685	295	10.00	9.50 - 11.00	7.4
		295 /35 ZR 19 (104)	(104)	(Y)	○	TL	○	691	306	10.50	10.00 - 11.50	7.4
	40	225 /40 ZR 19 (93)	(93)	(Y)	○	TL	○	665	232	8.00	7.50 - 9.00	7.9
		235 /40 ZR 19 (96)	(96)	(Y)	○	TL	○	673	244	8.50	8.00 - 9.50	7.9
		245 /40 ZR 19 (98)	(98)	(Y)	○	TL	○	681	251	8.50	8.00 - 9.50	7.9
		255 /40 ZR 19 (100)	(100)	(Y)	○	TL	○	689	263	9.00	8.50 - 10.00	7.9
		275 /40 ZR 19 (105)	(105)	(Y)	○	TL	○	705	282	9.50	9.00 - 11.00	7.7

AZENIS FK510

Rim (inch)	Aspect ratio (%)	Tire Size	Load Index	Speed Symbol	XL or RF	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
19	45	225 /45 ZR 19	96	Y	○	TL	○	687	227	7.50	7.00 - 8.50	7.9
		235 /45 ZR 19	99	Y	○	TL	○	697	238	8.00	7.50 - 9.00	7.9
		245 /45 ZR 19	(102)	(Y)	○	TL	○	705	246	8.00	7.50 - 9.00	7.9
		255 /45 ZR 19	(104)	(Y)	○	TL	○	717	258	8.50	8.00 - 9.50	7.9
		235 /55 ZR 19	105	Y	○	TL	○	745	248	7.50	6.50 - 8.50	7.9
18	35	225 /35 ZR 18	(87)	(Y)	○	TL	○	615	232	8.00	7.50 - 9.00	7.9
		245 /35 ZR 18	92	Y	○	TL	○	629	251	8.50	8.00 - 9.50	7.8
		255 /35 ZR 18	(94)	(Y)	○	TL	○	637	263	9.00	8.50 - 10.00	7.8
		265 /35 ZR 18	(97)	(Y)	○	TL	○	645	275	9.50	9.00 - 10.50	7.6
		275 /35 ZR 18	(99)	(Y)	○	TL	○	651	282	9.50	9.00 - 11.00	7.6
	40	285 /35 ZR 18	(101)	(Y)	○	TL	○	659	295	10.00	9.50 - 11.00	7.4
		225 /40 ZR 18	(92)	(Y)	○	TL	○	639	232	8.00	7.50 - 9.00	8.0
		235 /40 ZR 18	(95)	(Y)	○	TL	○	647	244	8.50	8.00 - 9.50	8.0
		245 /40 ZR 18	(97)	(Y)	○	TL	○	655	251	8.50	8.00 - 9.50	8.0
		255 /40 ZR 18	(99)	(Y)	○	TL	○	663	263	9.00	8.50 - 10.00	7.9
	45	275 /40 ZR 18	99	Y		TL		679	282	9.50	9.00 - 11.00	7.7
		225 /45 ZR 18	(95)	(Y)	○	TL	○	661	227	7.50	7.00 - 8.50	8.0
		235 /45 ZR 18	(98)	(Y)	○	TL	○	671	238	8.00	7.50 - 9.00	7.9
		245 /45 ZR 18	(100)	(Y)	○	TL	○	679	246	8.00	7.50 - 9.00	8.0
		255 /45 ZR 18	103	Y	○	TL	○	691	258	8.50	8.00 - 9.50	7.9
17	50	245 /50 ZR 18	(88)	(Y)	○	TL	○	707	256	7.50	7.00 - 8.50	7.9
		245 /40 ZR 17	95	Y	○	TL	○	630	251	8.50	8.00 - 9.50	7.9
		255 /40 ZR 17	94	W		TL		638	263	9.00	8.50 - 10.00	7.9
	45	275 /40 ZR 17	98	W		TL		654	282	9.50	9.00 - 11.00	7.7
		215 /45 ZR 17	91	Y	○	TL	○	628	215	7.00	7.00 - 8.00	7.9
		225 /45 ZR 17	94	Y	○	TL	○	636	227	7.50	7.00 - 8.50	8.0
		235 /45 ZR 17	97	Y	○	TL	○	646	238	8.00	7.50 - 9.00	7.9
		245 /45 ZR 17	99	Y	○	TL	○	654	246	8.00	7.50 - 9.00	7.9
		205 /50 ZR 17	93	Y	○	TL	○	640	216	6.50	5.50 - 7.50	7.9
		225 /50 ZR 17	98	Y	○	TL	○	662	235	7.00	6.00 - 8.00	8.0

AZENIS FK510 RUNFLAT

Rim (inch)	Aspect ratio (%)	Tire Size	Load Index	Speed Symbol	XL or RF	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
19	35	255 /35 RF 19	96	Y	○	TL	○	660	260	9.00	8.50 - 10.00	7.7
		275 /35 RF 19	100	Y	○	TL	○	674	278	9.50	9.00 - 11.00	7.7
	40	225 /40 RF 19	93	Y	○	TL	○	662	230	8.00	7.50 - 9.00	7.7
		245 /40 RF 19	98	Y	○	TL	○	678	248	8.50	8.00 - 9.50	7.7
18	40	255 /40 RF 18	99	Y	○	TL	○	660	260	9.00	8.50 - 10.00	7.7
		275 /40 RF 18	103	Y	○	TL	○	676	278	9.50	9.00 - 11.00	7.7
	45	225 /45 RF 18	95	Y	○	TL	○	658	225	7.50	7.00 - 8.50	7.7
		245 /45 RF 18	100	Y	○	TL	○	676	243	8.00	7.50 - 9.00	7.7
	50	245 /50 RF 18	104	Y	○	TL	○	702	253	7.50	7.00 - 8.50	7.7

AZENIS FK453

- FALKEN flagship tire for more grip and driving pleasure without compromising driving comfort.
- To achieve high speed handling and stability, Falken high loaded silica hard tread compound has been adopted.
- 3 wide straight grooves evacuate water effectively.
- Low noise and good handling and stability are achieved by optimized land/sea ratio.



AZENIS FK453

Rim (inch)	Aspect ratio (%)	Tire Size	Load Index	Speed Symbol	XL or RF	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
22	25	295 /25 ZR 22	97	Y	○	TL	○	709	297	10.50	10.00 - 11.00	7.2
	30	245 /30 ZR 22	92	Y	○	TL	○	707	248	8.50	8.00 - 9.00	7.6
		255 /30 ZR 22	95	Y	○	TL	○	713	258	9.00	8.50 - 9.50	7.6
20	25	285 /25 ZR 20	93	Y	○	TL	○	650	289	10.50	10.50 - 10.50	7.2
	30	295 /25 ZR 20	(95)	(Y)	○	TL	○	658	297	10.50	10.00 - 11.00	7.3
		225 /30 ZR 20	85	Y	○	TL	○	645	229	8.00	8.00 - 8.00	7.6
		235 /30 ZR 20	(88)	(Y)	○	TL	○	651	240	8.50	8.50 - 8.50	7.6
		245 /30 ZR 20	(90)	(Y)	○	TL	○	657	247	8.50	8.00 - 9.00	7.7
		255 /30 ZR 20	92	Y	○	TL	○	662	258	9.00	8.50 - 9.50	7.6
		275 /30 ZR 20	97	Y	○	TL	○	674	276	9.50	9.00 - 10.00	7.4
		275 /30 ZR 20	97	W	○	TL		674	276	9.50	9.00 - 10.00	7.4
		285 /30 ZR 20	99	Y	○	TL	○	678	289	10.00	9.50 - 10.50	7.2
		285 /30 ZR 20	99	W	○	TL		678	289	10.00	9.50 - 10.50	7.2
		245 /35 ZR 20	95	Y	○	TL	○	683	249	8.50	8.00 - 9.50	7.8
	35	245 /35 ZR 20	95	W	○	TL		683	249	8.50	8.00 - 9.50	7.8
		255 /35 ZR 20	97	Y	○	TL	○	686	260	9.00	8.50 - 10.00	7.9
		275 /35 ZR 20	102	Y	○	TL	○	701	280	9.50	9.00 - 11.00	7.6
		275 /35 ZR 20	102	W	○	TL		701	280	9.50	9.00 - 11.00	7.6
	40	245 /40 ZR 20	99	Y	○	TL	○	704	253	8.50	8.00 - 9.50	7.8
	40	245 /40 ZR 20	99	W	○	TL		704	253	8.50	8.00 - 9.50	7.8
		275 /40 ZR 20	106	Y	○	TL		725	285	9.50	9.00 - 11.00	7.8
	45	245 /45 ZR 20	103	Y	○	TL		728	246	8.00	7.50 - 9.00	7.9
	45	255 /45 ZR 20	105	Y	○	TL	○	737	262	8.50	8.00 - 9.50	7.8
		255 /45 ZR 20	105	W	○	TL		737	262	8.50	8.00 - 9.50	7.8
19	30	245 /30 ZR 19	89	Y	○	TL	○	632	247	8.50	8.00 - 9.00	7.7
		255 /30 ZR 19	91	Y	○	TL	○	636	259	9.00	8.50 - 9.50	7.6
		255 /30 ZR 19	91	W	○	TL		636	259	9.00	8.50 - 9.50	7.6
		265 /30 ZR 19	(93)	(Y)	○	TL	○	642	270	9.50	9.00 - 10.00	7.5
		265 /30 ZR 19	93	W	○	TL		642	270	9.50	9.00 - 10.00	7.4
		275 /30 ZR 19	(96)	(Y)	○	TL	○	650	274	9.50	9.00 - 10.00	7.4
		275 /30 ZR 19	96	W	○	TL		650	274	9.50	9.00 - 10.00	7.4
		285 /30 ZR 19	98	Y	○	TL	○	654	287	10.00	9.50 - 10.50	7.2
		295 /30 ZR 19	(100)	(Y)	○	TL	○	661	301	10.50	10.00 - 11.00	7.2
		295 /30 ZR 19	100	W	○	TL		661	301	10.50	10.00 - 11.00	7.2
	35	305 /30 ZR 19	(102)	(Y)	○	TL	○	667	311	11.00	10.50 - 11.50	7.1
		215 /35 ZR 19	85	Y	○	TL	○	633	219	7.50	7.00 - 8.50	7.8
		225 /35 ZR 19	88	Y	○	TL	○	642	232	8.00	7.50 - 9.00	7.9
		235 /35 ZR 19	(91)	(Y)	○	TL	○	647	244	8.50	8.00 - 9.50	7.9
		235 /35 ZR 19	91	W	○	TL		647	242	8.50	8.00 - 9.50	7.8
		245 /35 ZR 19	(93)	(Y)	○	TL	○	655	251	8.50	8.00 - 9.50	7.8
		245 /35 ZR 19	93	W	○	TL		655	251	8.50	8.00 - 9.50	7.8
		255 /35 ZR 19	(96)	(Y)	○	TL	○	661	263	9.00	8.50 - 10.00	7.9
		265 /35 ZR 19	98	Y	○	TL	○	668	273	9.50	9.00 - 10.50	7.6
		275 /35 ZR 19	(100)	(Y)	○	TL	○	674	279	9.50	9.00 - 11.00	7.6
	40	275 /35 ZR 19	100	W	○	TL		674	279	9.50	9.00 - 11.00	7.6
		285 /35 ZR 19	(99)	(Y)		TL	○	682	293	10.00	9.50 - 11.00	7.4
		225 /40 ZR 19	93	Y	○	TL		663	233	8.00	7.50 - 9.00	7.9
		235 /40 ZR 19	96	Y	○	TL	○	671	244	8.50	8.00 - 9.50	7.9
		245 /40 ZR 19	98	Y	○	TL	○	679	251	8.50	8.00 - 9.50	7.9
		245 /40 ZR 19	98	W	○	TL		677	254	8.50	8.00 - 9.50	7.8
		255 /40 ZR 19	100	Y	○	TL	○	687	263	9.00	8.50 - 10.00	7.9
		275 /40 ZR 19	101	Y	○	TL	○	703	281	9.50	9.00 - 11.00	7.7
		275 /40 ZR 19	101	W		TL		701	282	9.50	9.00 - 11.00	7.6

AZENIS FK453

Rim (inch)	Aspect ratio (%)	Tire Size	Load Index	Speed Symbol	XL or RF	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
18	45	225 /45 ZR 19	96	Y	○	TL	○	687	228	7.50	7.00 - 8.50	7.8
		225 /45 ZR 19	96	W	○	TL		687	228	7.50	7.00 - 8.50	7.8
		245 /45 ZR 19	102	Y	○	TL	○	703	248	8.00	7.50 - 9.00	7.8
		245 /45 ZR 19	102	W	○	TL		703	248	8.00	7.50 - 9.00	7.8
	30	295 /30 ZR 18	98	Y	○	TL	○	635	300	10.50	10.00 - 11.00	7.3
		215 /35 ZR 18	84	Y	○	TL	○	607	220	7.50	7.00 - 8.50	7.8
		225 /35 ZR 18	87	Y	○	TL	○	616	232	8.00	7.50 - 9.00	7.9
		245 /35 ZR 18	92	Y	○	TL	○	626	252	8.50	8.00 - 9.50	7.8
	35	245 /35 ZR 18	92	W	○	TL		626	252	8.50	8.00 - 9.50	7.8
		255 /35 ZR 18	94	Y	○	TL	○	634	262	9.00	8.50 - 10.00	7.8
		255 /35 ZR 18	94	W	○	TL		634	262	9.00	8.50 - 10.00	7.8
		265 /35 ZR 18 (97)	(97)	(Y)	○	TL	○	643	272	9.50	9.00 - 10.50	7.7
		265 /35 ZR 18	97	W	○	TL		642	274	9.50	9.00 - 10.50	7.6
	40	275 /35 ZR 18	99	Y	○	TL	○	646	282	9.50	9.00 - 11.00	7.6
		275 /35 ZR 18	99	W	○	TL		646	282	9.50	9.00 - 11.00	7.6
		285 /35 ZR 18	101	Y	○	TL	○	655	294	10.00	9.50 - 11.00	7.4
		285 /35 ZR 18	101	W	○	TL	○	655	294	10.00	9.50 - 11.00	7.4
18	40	215 /40 ZR 18	89	Y	○	TL	○	629	220	7.50	7.00 - 8.50	7.8
		225 /40 ZR 18	92	Y	○	TL	○	637	234	8.00	7.50 - 9.00	7.9
		235 /40 ZR 18 (95)	(95)	(Y)	○	TL		646	243	8.50	8.00 - 9.50	7.9
		235 /40 ZR 18	95	W	○	TL	○	644	246	8.50	8.00 - 9.50	7.8
	45	245 /40 ZR 18 (97)	(97)	(Y)	○	TL		653	251	8.50	8.00 - 9.50	7.9
		245 /40 ZR 18	97	W	○	TL	○	651	253	8.50	8.00 - 9.50	7.8
		255 /40 ZR 18 (99)	(99)	(Y)	○	TL	○	661	263	9.00	8.50 - 10.00	7.9
		265 /40 ZR 18 (101)	(101)	(Y)	○	TL	○	669	275	9.50	9.00 - 10.50	7.6
	50	275 /40 ZR 18	99	Y		TL		675	283	9.50	9.00 - 11.00	7.6
		275 /40 ZR 18	99	W		TL	○	675	283	9.50	9.00 - 11.00	7.6
	45	215 /45 ZR 18	93	Y	○	TL		651	217	7.00	7.00 - 8.00	7.8
		215 /45 ZR 18	93	W	○	TL	○	651	217	7.00	7.00 - 8.00	7.8
		225 /45 ZR 18	95	Y	○	TL		657	231	7.50	7.00 - 8.50	7.8
		225 /45 ZR 18	95	W	○	TL	○	657	231	7.50	7.00 - 8.50	7.8
17	40	235 /45 ZR 18	98	Y	○	TL		667	240	8.00	7.50 - 9.00	7.9
		235 /45 ZR 18	98	W	○	TL	○	668	243	8.00	7.50 - 9.00	7.8
		245 /45 ZR 18	100	Y	○	TL		677	246	8.00	7.50 - 9.00	7.9
		245 /45 ZR 18	100	W	○	TL	○	675	249	8.00	7.50 - 9.00	7.8
	50	255 /45 ZR 18	103	Y	○	TL		685	261	8.50	8.00 - 9.50	7.8
		225 /50 ZR 18	95	W		TL	○	683	236	7.00	6.00 - 8.00	7.9
		235 /50 ZR 18	101	W	○	TL	○	693	248	7.50	6.50 - 8.50	7.9
	40	205 /40 ZR 17	84	W	○	TL	○	596	210	7.50	7.00 - 8.00	7.9
		235 /40 ZR 17	94	Y	○	TL	○	619	247	8.50	8.00 - 9.50	7.9
		245 /40 ZR 17	95	Y	○	TL		625	254	8.50	8.00 - 9.50	7.8
		245 /40 ZR 17	95	W	○	TL	○	625	254	8.50	8.00 - 9.50	7.8
	45	255 /40 ZR 17	98	Y	○	TL		634	266	9.00	8.50 - 10.00	7.8
		255 /40 ZR 17	98	W	○	TL	○	634	266	9.00	8.50 - 10.00	7.8
		265 /40 ZR 17	100	Y	○	TL	○	642	276	9.50	9.00 - 10.50	7.6
		275 /40 ZR 17	98	Y		TL	○	649	284	9.50	9.00 - 11.00	7.6
17	45	215 /45 ZR 17	91	Y	○	TL		625	217	7.00	7.00 - 8.00	7.8
		215 /45 ZR 17	91	W	○	TL	○	625	217	7.00	7.00 - 8.00	7.8
		225 /45 ZR 17	94	Y	○	TL		636	229	7.50	7.00 - 8.50	7.9
		225 /45 ZR 17	94	W	○	TL	○	632	230	7.50	7.00 - 8.50	8.2
	50	235 /45 ZR 17	97	Y	○	TL		642	240	8.00	7.50 - 9.00	7.9
		235 /45 ZR 17	97	W	○	TL	○	643	244	8.00	7.50 - 9.00	7.8
		245 /45 ZR 17	99	Y	○	TL	○	652	246	8.00	7.50 - 9.00	7.9
		205 /50 ZR 17	93	Y	○	TL	○	639	215	6.50	5.50 - 7.50	7.9
	55	215 /50 ZR 17	91	W		TL	○	649	228	7.00	6.00 - 7.50	7.9
		225 /50 ZR 17	98	Y	○	TL		660	235	7.00	6.00 - 8.00	7.9
		225 /50 ZR 17	98	W	○	TL	○	660	234	7.00	6.00 - 8.00	7.8
		225 /55 R 17	101	W	○	TL	○	682	236	7.00	6.00 - 8.00	7.9
	55	235 /55 ZR 17	103	W	○	TL		691	243	7.50	6.50 - 8.50	7.9

ZIEX ZE914 ECORUN

- Increasing Land/Sea ratio in the shoulder area, heightening the rigidity of the center rib and introducing a new pattern with optimized lug grooves and sipping, leads to even contact pressure, thus enhances wear performance.
- Furthermore, reduction of shoulder movement reduces shoulder wear.
- Use of a silica rich compound with a heightened ratio of silica that connects to the polymer, creates excellent flexibility while also allowing it to closely follow the delicate indentations on the road surface, thus increasing wet grip.
- Particular suited to sporty performance vehicles.



ZIEX ZE914 ECORUN

Rim (inch)	Aspect ratio (%)	Tire Size	Load Index	Speed Symbol	XL or RF	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
18	35	255 /35 R 18	90	W		TL	○	635	260	9.00	8.50 - 10.00	7.9
		265 /35 R 18	97	W	○	TL	○	643	271	9.50	9.00 - 10.50	7.9
	40	205 /40 R 18	86	W	○	TL	○	621	212	7.50	7.00 - 8.00	7.8
		215 /40 R 18	89	W	○	TL	○	629	218	7.50	7.00 - 8.50	7.8
		225 /40 R 18	92	W	○	TL	○	637	230	8.00	7.50 - 9.00	8.0
		235 /40 R 18	95	W	○	TL	○	645	241	8.50	8.00 - 9.50	7.9
		245 /40 R 18	97	W	○	TL	○	653	248	8.50	8.00 - 9.50	7.9
		215 /45 R 18	93	W	○	TL	○	651	213	7.00	7.00 - 8.00	7.8
	45	225 /45 R 18	95	W	○	TL	○	659	225	7.50	7.00 - 8.50	7.9
		245 /45 R 18	100	W	○	TL	○	677	243	8.00	7.50 - 9.00	7.9
		235 /50 R 18	101	W	○	TL	○	693	245	7.50	6.50 - 8.50	8.0
	55	215 /55 R 18	95	H		TL	○	693	226	7.00	6.00 - 7.50	7.8
		225 /55 R 18	98	H		TL	○	705	233	7.00	6.00 - 8.00	8.0
		235 /55 R 18	100	V		TL	○	715	245	7.50	6.50 - 8.50	8.0
		255 /55 R 18	109	V	○	TL	○	737	265	8.00	7.00 - 9.00	8.0
	60	225 /60 R 18	100	H		TL	○	727	228	6.50	6.00 - 8.00	7.9
		235 /60 R 18	107	V		TL	○	739	240	7.00	6.50 - 8.50	8.0
		265 /60 R 18	110	V		TL	○	775	272	8.00	7.50 - 9.50	8.0
	65	235 /65 R 18	106	H		TL	○	765	240	7.00	6.50 - 8.50	8.0
17	40	195 /40 R 17	81	W	○	TL	○	588	200	7.00	6.50 - 7.50	7.7
		205 /40 R 17	84	W	○	TL	○	596	212	7.50	7.00 - 8.00	7.7
		215 /40 R 17	87	W	○	TL	○	604	218	7.50	7.00 - 8.50	7.8
		245 /40 R 17	91	W		TL	○	628	248	8.50	8.00 - 9.50	7.9
	45	195 /45 R 17	85	W	○	TL	○	608	195	6.50	6.00 - 7.50	7.7
		205 /45 R 17	88	W	○	TL	○	616	206	7.00	6.50 - 7.50	7.7
		205 /45 RF 17	84	W		TL	○	616	206	7.00	6.50 - 7.50	7.6
		215 /45 R 17	91	W	○	TL	○	626	213	7.00	7.00 - 8.00	7.8
		225 /45 R 17	94	W	○	TL		634	225	7.50	7.00 - 8.50	8.0
		225 /45 RF 17	91	W		TL	○	634	225	7.50	7.00 - 8.50	8.0
		235 /45 R 17	94	W		TL	○	644	236	8.00	7.50 - 9.00	7.9
		245 /45 R 17	95	W		TL	○	652	243	8.00	7.50 - 9.00	7.9
	50	205 /50 R 17	93	W	○	TL	○	638	214	6.50	5.50 - 7.50	7.7
		215 /50 R 17	91	W		TL	○	648	226	7.00	6.00 - 7.50	7.8
		225 /50 R 17	94	W		TL	○	658	233	7.00	6.00 - 8.00	7.9
		225 /50 RF 17	94	W		TL	○	658	233	7.00	6.00 - 8.00	8.0
		235 /50 R 17	96	W		TL	○	668	245	7.50	6.50 - 8.50	7.9
		205 /55 R 17	91	V		TL	○	658	214	6.50	5.50 - 7.50	7.7
	55	205 /55 RF 17	91	W		TL	○	658	214	6.50	5.50 - 7.50	7.3
		215 /55 R 17	94	W		TL	○	668	226	7.00	6.00 - 7.50	7.8
		225 /55 R 17	101	W	○	TL	○	680	233	7.00	6.00 - 8.00	7.9
		235 /55 R 17	99	W		TL	○	690	245	7.50	6.50 - 8.50	7.9
		215 /60 R 17	96	H		TL	○	690	221	6.50	6.00 - 7.50	7.9
	60	225 /60 R 17	99	H		TL		702	228	6.50	6.00 - 8.00	8.0
		225 /60 R 17	99	V		TL		702	228	6.50	6.00 - 8.00	8.0
		235 /60 R 17	102	H		TL	○	714	240	7.00	6.50 - 8.50	8.0
	65	225 /65 R 17	102	V		TL	○	724	228	6.50	6.00 - 8.00	7.9
		235 /65 R 17	108	V		TL	○	740	240	7.00	6.50 - 8.50	8.0
16	40	195 /40 R 16	80	V	○	TL	○	562	200	7.00	6.50 - 7.50	7.6
		215 /40 R 16	86	W	○	TL	○	578	218	7.50	7.00 - 8.50	7.8
	45	195 /45 R 16	84	V	○	TL	○	582	195	6.50	6.00 - 7.50	7.6
		205 /45 R 16	87	V	○	TL	○	590	206	7.00	6.50 - 7.50	7.7
		215 /45 R 16	86	V		TL	○	600	213	7.00	7.00 - 8.00	7.8

ZIEX ZE914 ECORUN

Rim (inch)	Aspect ratio (%)	Tire Size	Load Index	Speed Symbol	XL or RF	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
16	50	185 /50 R 16	81	V		TL	○	592	194	6.00	5.00 - 6.50	7.7
		195 /50 R 16	88	V	○	TL	○	602	201	6.00	5.50 - 7.00	7.6
		205 /50 R 16	87	V		TL	○	612	214	6.50	5.50 - 7.50	7.7
		225 /50 R 16	96	W	○	TL	○	632	233	7.00	6.00 - 8.00	7.9
	55	185 /55 R 16	83	V		TL		610	194	6.00	5.00 - 6.50	7.6
		195 /55 R 16	87	V		TL	○	620	201	6.00	5.50 - 7.00	7.7
		195 /55 RF 16	87	W		TL	○	620	201	6.00	5.50 - 7.00	7.2
		205 /55 R 16	91	V		TL	○	632	214	6.50	5.50 - 7.50	7.8
		205 /55 R 16	91	W		TL		632	214	6.50	5.50 - 7.50	7.8
		205 /55 RF 16	91	W		TL	○	632	214	6.50	5.50 - 7.50	7.3
		215 /55 R 16	93	V		TL		640	227	7.00	6.00 - 7.50	7.8
		215 /55 R 16	93	W		TL		641	227	7.00	6.00 - 7.50	7.8
		215 /55 R 16	97	W	○	TL	○	642	226	7.00	6.00 - 7.50	7.8
		225 /55 R 16	95	V		TL	○	654	233	7.00	6.00 - 8.00	8.0
		225 /55 R 16	99	W	○	TL	○	654	233	7.00	6.00 - 8.00	7.9
	60	195 /60 R 16	89	V		TL	○	640	201	6.00	5.50 - 7.00	7.8
		205 /60 R 16	92	H		TL		651	208	6.00	5.50 - 7.50	7.9
		205 /60 R 16	96	V	○	TL	○	652	209	6.00	5.50 - 7.50	7.9
		215 /60 R 16	99	H	○	TL	○	664	221	6.50	6.00 - 7.50	7.9
		215 /60 R 16	95	V		TL		668	224	6.50	6.00 - 7.50	7.1
		225 /60 R 16	98	W		TL	○	676	228	6.50	6.00 - 8.00	8.0
	65	235 /60 R 16	100	W		TL	○	688	240	7.00	6.50 - 8.50	8.0
		205 /65 R 16	95	V		TL	○	672	209	6.00	5.50 - 7.00	8.0
		215 /65 R 16	98	H		TL	○	686	221	6.50	6.00 - 7.50	7.9
15	70	205 /70 R 16	97	H		TL	○	694	209	6.00	5.00 - 7.00	8.1
		195 /45 R 15	78	V		TL	○	557	195	6.50	6.00 - 7.50	7.6
	50	175 /50 R 15	75	H		TL	○	557	182	5.50	5.00 - 6.00	7.7
		195 /50 R 15	82	V		TL	○	577	201	6.00	5.50 - 7.00	7.6
		205 /50 R 15	86	V		TL	○	587	214	6.50	5.50 - 7.50	7.7
	55	185 /55 R 15	82	H		TL	○	585	194	6.00	5.00 - 6.50	7.6
		185 /55 R 15	86	V	○	TL	○	585	194	6.00	5.00 - 6.50	7.5
		195 /55 R 15	85	H		TL		595	201	6.00	5.50 - 7.00	7.7
		195 /55 R 15	85	V		TL	○	595	201	6.00	5.50 - 7.00	7.6
		205 /55 R 15	88	V		TL	○	607	214	6.50	5.50 - 7.50	7.7
		175 /60 R 15	81	H		TL	○	591	177	5.00	5.00 - 6.00	7.6
	60	185 /60 R 15	84	H		TL	○	603	189	5.50	5.00 - 6.50	7.8
		185 /60 R 15	88	H	○	TL	○	603	189	5.50	5.00 - 6.50	7.7
		195 /60 R 15	88	H		TL	○	615	201	6.00	5.50 - 7.00	7.9
		195 /60 R 15	88	V		TL	○	615	201	6.00	5.50 - 7.00	7.8
		205 /60 R 15	91	H		TL	○	627	209	6.00	5.50 - 7.50	7.9
		205 /60 R 15	91	V		TL	○	627	209	6.00	5.50 - 7.50	7.9
		225 /60 R 15	96	W		TL	○	651	228	6.50	6.00 - 8.00	8.0
	65	165 /65 R 15	81	H		TL	○	595	170	5.00	4.50 - 6.00	7.7
		175 /65 R 15	84	H		TL	○	609	177	5.00	5.00 - 6.00	7.6
		185 /65 R 15	88	H		TL		621	189	5.50	5.00 - 6.50	7.8
		195 /65 R 15	91	H		TL		637	201	6.00	5.50 - 7.00	7.9
		195 /65 R 15	91	V		TL		637	201	6.00	5.50 - 7.00	7.9
		205 /65 R 15	94	H		TL	○	647	209	6.00	5.50 - 7.50	7.9
		215 /65 R 15	96	H		TL	○	661	221	6.50	6.00 - 7.50	7.9
14	55	185 /55 R 14	80	H		TL	○	560	194	6.00	5.00 - 6.50	7.6
		165 /60 R 14	75	H		TL	○	554	170	5.00	4.50 - 6.00	7.7
		175 /60 R 14	79	H		TL	○	566	177	5.00	5.00 - 6.00	7.7
		185 /60 R 14	82	H		TL	○	578	189	5.50	5.00 - 6.50	7.8
		205 /60 R 14	88	H		TL	○	602	209	6.00	5.50 - 7.50	8.0
	65	175 /65 R 14	82	H		TL	○	584	177	5.00	5.00 - 6.00	7.7
		185 /65 R 14	86	H		TL	○	596	189	5.50	5.00 - 6.50	7.8
13	60	185 /60 R 13	80	H		TL	○	552	189	5.50	5.00 - 6.50	7.8
12	60	165 /60 R 12	71	H		TL	○	503	170	5.00	4.50 - 6.00	7.7

SINCERA SN832i



A tire designed for small cars, SN832i has low noise and offers a comfortable ride. It is designed for fuel-efficiency and long life. Key features include.

- Lateral Rigidity Distribution.
- Optimized footprint and contact pressure.
- Optimized wear energy during cornering.

SINCERA SN832 i

Rim (inch)	Aspect ratio (%)	Tire Size	Load Index	Speed Symbol	XL or RF	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
16	50	195 /50 R 16	84	H		TL	○	602	197	6.00	5.50 - 7.00	8.3
		205 /50 R 16	87	H		TL	○	612	209	6.50	5.50 - 7.50	8.4
	55	195 /55 R 16	87	H		TL	○	620	202	6.00	5.50 - 7.00	8.3
		205 /55 R 16	91	H		TL	○	633	212	6.50	5.50 - 7.50	8.4
	60	205 /60 R 16	92	H		TL	○	651	205	6.00	5.50 - 7.50	8.4
		215 /60 R 16	95	H		TL	○	663	217	6.50	6.00 - 7.50	8.5
15	50	165 /50 R 15	72	H		TL	○	547	163	5.00	4.50 - 6.00	7.5
		175 /50 R 15	75	H		TL	○	557	177	5.50	5.00 - 6.00	8.1
		195 /50 R 15	82	H		TL	○	577	197	6.00	5.50 - 7.00	8.3
		185 /55 R 15	82	H		TL	○	583	193	6.00	5.00 - 6.50	8.2
	55	195 /55 R 15	85	H		TL	○	595	199	6.00	5.50 - 7.00	8.3
		185 /60 R 15	84	H		TL	○	602	185	5.50	5.00 - 6.50	8.2
		195 /60 R 15	88	H		TL	○	613	199	6.00	5.50 - 7.00	8.3
		205 /60 R 15	91	H		TL	○	626	205	6.00	5.50 - 7.50	8.4
	65	185 /65 R 15	88	T		TL	○	621	189	5.50	5.00 - 6.50	8.2
		195 /65 R 15	91	H		TL	○	635	201	6.00	5.50 - 7.00	8.3
		205 /65 R 15	94	H		TL	○	647	209	6.00	5.50 - 7.50	8.4
		215 /65 R 15	96	H		TL	○	661	221	6.50	6.00 - 7.50	8.5
	70	205 /70 R 15	96	S		TL	○	669	210	6.00	5.00 - 7.00	8.4
		215 /70 R 15	98	T		TL	○	682	230	6.50	5.50 - 7.00	8.5
14	55	165 /55 R 14	72	T		TL	○	536	169	5.00	4.50 - 6.00	7.5
		165 /60 R 14	75	T		TL	○	551	168	5.00	4.50 - 6.00	7.5
	60	185 /60 R 14	82	H		TL	○	577	185	5.50	5.00 - 6.50	8.2
		165 /65 R 14	79	T		TL	○	570	170	5.00	4.50 - 6.00	7.5
	65	175 /65 R 14	82	T		TL	○	584	177	5.00	5.00 - 6.00	8.1
		185 /65 R 14	86	H		TL	○	596	189	5.50	5.00 - 6.50	8.2
		165 /70 R 14	81	T		TL	○	587	173	5.00	4.00 - 5.50	7.5
	70	175 /70 R 14	84	T		TL	○	601	179	5.00	4.50 - 6.00	8.1
		185 /70 R 14	88	T		TL	○	616	191	5.50	4.50 - 6.00	8.2
		195 /70 R 14	91	H		TL	○	630	202	6.00	5.00 - 6.50	8.3
13	60	165 /60 R 13	73	T		TL	○	527	168	5.00	4.50 - 6.00	7.5
		165 /65 R 13	77	T		TL	○	543	177	5.00	4.50 - 6.00	7.5
	70	155 /70 R 13	75	T		TL	○	548	156	4.50	4.00 - 5.00	7.4
		165 /70 R 13	79	T		TL	○	561	177	5.00	4.00 - 5.50	7.5
		175 /70 R 13	82	T		TL	○	575	178	5.00	4.50 - 6.00	8.1
12	70	185 /70 R 13	86	T		TL	○	590	191	5.50	4.50 - 6.00	8.2
		155 /70 R 12	73	T		TL	○	523	158	4.50	4.00 - 5.00	7.4

SINCERA SN832 Ecorun

- Enhanced fuel efficiency and wet performance.
- Wide straight and lateral grooves enhance aquaplaning resistance.



SINCERA SN832 Ecorun

Rim (inch)	Aspect ratio (%)	Tire Size	Load Index	Speed Symbol	XL or RF	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width [code]		Tread Depth (mm)
										Measuring	Approved	
15	55	175 /55 R 15	77	T		TL	○	575	183	5.50	5.00 - 6.00	8.1
	60	155 /60 R 15	74	T		TL	○	569	156	4.50	4.50 - 5.50	8.1
		165 /60 R 15	77	T		TL	○	581	170	5.00	4.50 - 6.00	8.1
		185 /60 R 15	84	T		TL	○	605	190	5.50	5.00 - 6.50	8.2
		145 /65 R 15	72	T		TL	○	572	149	4.50	4.00 - 5.00	8.1
	65	165 /65 R 15	81	T		TL	○	598	169	5.00	4.50 - 6.00	8.1
		175 /65 R 15	84	T		TL	○	614	176	5.00	5.00 - 6.00	8.2
		185 /65 R 15	88	T		TL	○	626	188	5.50	5.00 - 6.50	8.3
		195 /65 R 15	91	T		TL	○	640	200	6.00	5.50 - 7.00	8.4
		14	165 /60 R 14	79	T	○	TL	○	556	170	5.00	4.50 - 6.00
185 /60 R 14	82		T		TL	○	580	190	5.50	5.00 - 6.50	8.2	
65	155 /65 R 14		75	T		TL	○	561	156	4.50	4.50 - 5.50	8.1
	165 /65 R 14		79	T		TL	○	573	169	5.00	4.50 - 6.00	8.1
	175 /65 R 14		82	T		TL	○	589	176	5.00	5.00 - 6.00	8.2
185 /65 R 14	86		T		TL	○	601	188	5.50	5.00 - 6.50	8.3	
70	165 /70 R 14		81	T		TL	○	593	170	5.00	4.00 - 5.50	8.2
	175 /70 R 14		84	T		TL	○	607	177	5.00	4.50 - 6.00	8.3
13	70	155 /70 R 13	75	T		TL	○	551	156	4.50	4.00 - 5.00	8.1
		165 /70 R 13	79	T		TL	○	567	170	5.00	4.00 - 5.50	8.2
		175 /70 R 13	82	T		TL	○	581	177	5.00	4.50 - 6.00	8.3



FALKEN

SINCERA SN807

- Low noise and comfortable ride.
- Designed for fuel-efficiency and long service life.



Rim (inch)	Aspect ratio (%)	Tire Size	Load Index	Speed Symbol	XL or RF	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
14	80	165 /80 R 14	85	T		TT	○	620	165	4.50	4.00 - 5.50	7.4
		175 /80 R 14	88	T		TL	○	638	181	5.00	4.50 - 6.00	7.4
13	80	155 /80 R 13	79	T		TL	○	580	159	4.50	4.00 - 5.00	7.2
		165 /80 R 13	83	T		TL	○	596	164	4.50	4.00 - 5.50	7.3
12	80	145 /80 R 12	74	T		TL	○	539	146	4.00	3.50 - 5.00	6.4
		155 /80 R 12	77	T		TL	○	555	157	4.50	4.00 - 5.00	7.2
10	80	145 /80 R 10	69	S		TL	○	488	145	4.00	3.50 - 5.00	6.4



Sample image

4x4【4WD】& SUV TIRES



Passenger
Car



4x4 (4WD) &
SUV



Light Truck



Truck



Bus

FALKEN



SERIES	SIZE	LI		FK510SUV	FK453CC	S/TZ05	S/TZ04	WPHT01	WPAT01	WPAT3W	WPMT01
		St'd	Reinf								
30	295/30R22	99	103				*103W				
35	315/35R20	106	110	110Y	110Y						
	265/35R22	98	102			102H					
	285/35R22				106W						
	295/35R24	-	110			110H					
	305/35R24	-	112			112H					
40	275/40R20	102	106	106Y	106Y,W	106H					
	265/40R22	-	106			106H					
	285/40R22	106	110			110H					
	295/40R20				110W						
	305/40R22	110	114			114H					
45	275/45R19	-	-		108Y						
	285/45R19	-	-		111W						
	245/45R20	-	-		103Y						
	265/45R20	104	108	108Y							
	275/45R20	106	110	110W	110W	110H	(P)106H				
	295/45R20	110	114			114H					
	275/45R22	-	116				112H				
	285/45R22	110	114			114H					
	305/45R22	-	118			118H	(P)118H				
50	235/50R18	97	101	101Y	101Y						
	245/50R18	-	-		100Y						
	255/50R19	103	107	107Y	107Y						
	265/50R19	-	-		110Y						
	245/50R20	-	-			102H					
	255/50R20	105	109		109W	109H					
	265/50R20	107	111			111H					
	285/50R20	112	116			116V	112H	112V	116T		
	295/50R20	-	118				118H				
	305/50R20	116	120			120H					
55	235/55R17	99	103	103W	103W						
	245/55R17	-	-		102W						
	235/55R18	100	104	104Y	100V						
	255/55R18	105	109	109W	109W	109V					
	235/55R19	-	-		105W						
	245/55R19	-	-			103H					
	255/55R19	107	111	111W	111V						
	275/55R20	113	117			117H	117H		(P)111T		
	285/55R20	-	-							122/119T	
	305/55R20	-	-							121/118S	121/118Q
60	235/60R16	100	104				(P)99H,**100H	100H			
	215/60R17	96	100						96H		
	235/60R17	102	106		102V			102H			
	275/60R17	110	-				*111H				
	235/60R18	103	107	107W	107W	107V		107H			
	255/60R18	108	112		112W			112V			
	265/60R18	110	114			110V	*110H	110H		114T	
	275/60R18	113	117				113H				
	285/60R18	116	120				116H	116H	116H,120H		
	325/60R18	-	-								
	255/60R19	109	113			109H					
	265/60R20	-	-							121/118S	
	275/60R20	115	116			115H			115S	115T	
	325/60R20	-	-							126/123S	
65	215/65R16	98	102				**98H				
	255/65R16	109	113				(P)106S		109T		
	225/65R17	102	106					102H			
	235/65R17	104	108		108V			104T,108H	104T		
	245/65R17	107	111					107S	111H	111T	
	255/65R17	110	114						110S	114T	
	265/65R17	112	116				112H	112S	112H,S	116T	
	275/65R17	115	119				115H	115S	115H		
	285/65R17	116	-					116H			
	235/65R18	106	110					106H			
	265/65R18	114	116								
	275/65R18	116	116				116T		*123/120Q	123/120S	
	285/65R18	-	-						*121/118S	125/122S	125/122Q
	305/65R18	-	-							124/121R	
	325/65R18	-	-							127/124S	
	275/65R20	-	-							126/123S	

To be continue next page.



SERIES	SIZE	LI		FK510SUV	FK453CC	S/TZ05	S/TZ04	WPHT01	WPAT01	WPAT3W	WPMT01
		St'd	Reinf								
70	205/70R15	96	100				**95S,**95H	96T			
	215/70R15	98	103					98H			
	225/70R15	100	104					100S			
	255/70R15	108	-				(P)108S	108H,T	108S		
	265/70R15	112	116				(P)110S,**110H	112H	112T		
	215/70R16	100	104				(P)99S,**99H	100S	100T		
	225/70R16	103	107					103T			
	235/70R16	106	109				(P)104S,**106H	106S	106T	109T	
	245/70R16	107	111				(P)106S,**107H,T	111T	107T,S,*113/110Q		
	255/70R16	111	115				(P)109S	111S		115T	
	265/70R16	112	116				(P)111S,**112H,T	112S	112T,S,*117/114Q	112T	
	275/70R16	114	-				114S,**114H	114H	114T,S		
	305/70R16	-	-						*124/120S	124/121R	
	245/70R17	110	114					110S	*119/118Q	119/116S	
	255/70R17	112	-								
	265/70R17	115	116					115S,121/118S	(P)113S,*121/110S	121/118S	121/118Q
	285/70R17	-	-						*121/118S		121/118Q
	LT295/70R17	-	-								121/118Q
	315/70R17	125	-						121/118Q	121/118S	121/118Q
	255/70R18	113	116								
	265/70R18	116	-				(P)114S		116S	116T	
	275/70R18	-	-							125/122S	125/122Q
75	215/75R15	100	-						100/97S		
	225/75R15	102	106					102S			
	235/75R15	105	109				**104/101Q	109S,104/101S	105S,104/101S	109T	
	225/75R16	104	108					108S,115/112S	110/107Q	115/112S	
	235/75R16	108	112					112S			
	245/75R16	111	115				(P)109S	111S,120/116S,108/104S	*120/116Q	(P)112T	120/116Q
	265/75R16	116	116					116S,123/120Q	123/120Q		123/120Q
	285/75R16	-	-						*122/119Q	126/123R	126/123Q
	315/75R16	-	-						121/118S		127/124Q
	235/75R17	109	-							109T	
	245/75R17	112	-						*121/118Q	121/118S	
	LT255/75R17	-	-								111/108Q
	285/75R17	-	-							121/118S	
80	195/80R15	96	100				**96H				
	215/80R15	102	106				**101S				
	205/80R16	100	104						104T		
	215/80R16	-	-				**103S				
	235/80R17	-	-								120/117Q
85 Metric Flotation	235/85R16	-	-					120/116Q		120/116S	120/116Q
	205R16	-	-						110/108R		
	30X9.50R15	96	104				**104Q	104S	104S	104S	104Q
	31X10.50R15	100	109				109S,**109Q	109S	109S	109S	109Q
	32X11.50R15	104	113						113S	113R	
	33X12.50R15	100	108						108S	108R	108Q
	33X12.50R17	-	-						*114S		120Q
	33X12.50R20LT	-	-								114Q
	35X12.50R15	-	-						113S	113R	113Q
	35X12.50R17	-	-							121R	121Q
	35X12.50R18LT	-	-								123Q
	35X12.50R20	-	-							121R	121Q
	37X12.50R17	-	-						124S		124Q
	37X12.50R20LT	-	-								127Q

4x4[4WD]& SUV TIRES

SAFETY WARNING

SERIOUS INJURY OR DEATH MAY RESULT FROM EXPLOSION OF TIRE/RIM ASSEMBLY, IF PROPER MOUNTING INSTRUCTIONS ARE NOT FOLLOWED.

- ***ONLY** specially trained persons should mount tires.
- ***ALWAYS** match rim diameter with tire bead diameter.
- ***NEVER** mount a tire on a cracked, bent, rusted or otherwise damaged rim or a rim which has been repaired.
- ***NEVER** put a flammable substance into a tire.
- ***ALWAYS** clean and lubricate the rim and tire beads.
- ***ALWAYS** use an extension air hose with gauge and clip-on air chuck.
- ***ALWAYS** lock the wheel on the tire mounting machine, or place it in a safety cage when inflating.
- ***ALWAYS** stand clear, and **NEVER** lean or reach over the tire/rim assembly when inflating.
- ***NEVER** inflate over 40 psi (275 kPa) to seat beads.
- ***ALWAYS** adjust tire pressure to the vehicle manufacturer's recommendations after beads are fully seated.

4x4[4WD] & SUV TIRES LINE-UP



AZENIS FK510SUV



WILDPEAK H/T 01



ZIEXS/TZ05



WILDPEAK A/T AT3W



WILDPEAK M/T 01

ONROAD

OFFROAD



AZENIS FK510SUV

- Falken's latest generation ultra high performance summer tire, the AZENIS FK510 SUV is designed for drivers of premium vehicles looking for excellent grip and outstanding performance.
- 4D Nano Design enables Falken engineers to optimize new high-performance compounds at the molecular level, enhancing both wear and wet weather traction.
- Featuring hybrid undertread materials, the FK510 SUV delivers confidence-inspiring handling and stability.



AZENIS FK510 SUV

Rim (inch)	Aspect ratio (%)	Tire Size	Ply Rating	Load Index	Speed Symbol	XL or RF	Sidewall Style	TL	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
												Measuring	Approved	
22	30	295 /30 R 22		103	Y	○	BLK	TL	○	739	306	10.50	10.00 - 11.00	7.3
	35	265 /35 R 22		102	Y	○	BLK	TL	○	747	275	9.50	9.00 - 10.50	7.6
		285 /35 R 22		106	Y	○	BLK	TL	○	761	295	10.00	9.50 - 11.00	7.4
21	35	285 /35 R 21		105	Y	○	BLK	TL	○	735	295	10.00	9.50 - 11.00	7.4
		295 /35 R 21		107	Y	○	BLK	TL	○	741	306	10.50	10.00 - 11.50	7.4
	40	265 /40 R 21		105	Y	○	BLK	TL	○	747	275	9.50	9.00 - 10.50	7.7
20		285 /40 R 21		109	Y	○	BLK	TL	○	765	295	10.00	9.50 - 11.00	7.5
	45	285 /45 ZR 21		(113)	(Y)	○	BLK	TL	○	793	289	9.50	9.00 - 10.50	7.5
	35	315 /35 R 20		110	Y	○	BLK	TL	○	730	326	11.00	10.50 - 12.50	7.2
19	40	275 /40 R 20		106	Y	○	BLK	TL	○	730	282	9.50	9.00 - 11.00	7.7
		295 /40 R 20		110	Y	○	BLK	TL	○	748	306	10.50	10.00 - 11.50	7.5
	45	255 /45 R 20		105	W	○	BLK	TL	○	742	258	8.50	8.00 - 9.50	7.9
18		265 /45 R 20		108	Y	○	BLK	TL	○	750	270	9.00	8.50 - 10.00	7.7
		275 /45 R 20		110	W	○	BLK	TL	○	760	277	9.00	8.50 - 10.50	7.7
		285 /45 R 20		112	Y	○	BLK	TL	○	768	289	9.50	9.00 - 10.50	7.5
17		295 /45 R 20		114	W	○	BLK	TL	○	778	301	10.00	9.50 - 11.00	7.5
	50	255 /50 R 20		109	Y	○	BLK	TL	○	768	269	8.00	7.00 - 9.00	7.9
		275 /50 R 20		113	Y	○	BLK	TL	○	789	288	8.50	7.50 - 9.50	7.7
16	50	235 /50 R 19		103	W	○	BLK	TL	○	723	248	7.50	6.50 - 8.50	7.9
		255 /50 R 19		107	Y	○	BLK	TL	○	743	269	8.00	7.00 - 9.00	7.9
		265 /50 R 19		110	Y	○	BLK	TL	○	753	281	8.50	7.50 - 9.50	7.7
15	55	225 /55 R 19		99	W	○	BLK	TL	○	735	235	7.00	6.00 - 8.00	7.9
		235 /55 R 19		105	Y	○	BLK	TL	○	745	248	7.50	6.50 - 8.50	7.9
		255 /55 R 19		111	W	○	BLK	TL	○	769	269	8.00	7.00 - 9.00	7.9
14		265 /55 R 19		109	Y	○	BLK	TL	○	781	281	8.50	7.50 - 9.50	7.7
	50	215 /50 R 18		92	W	○	BLK	TL	○	675	228	7.00	6.00 - 7.50	7.9
		225 /50 R 18		95	W	○	BLK	TL	○	687	235	7.00	6.00 - 8.00	7.9
13		235 /50 R 18		101	Y	○	BLK	TL	○	697	248	7.50	6.50 - 8.50	7.9
		255 /50 R 18		106	W	○	BLK	TL	○	717	269	8.00	7.00 - 9.00	7.9
	55	215 /55 R 18		99	W	○	BLK	TL	○	697	228	7.00	6.00 - 7.50	7.9
12		225 /55 R 18		102	W	○	BLK	TL	○	709	235	7.00	6.00 - 8.00	7.9
		235 /55 R 18		104	Y	○	BLK	TL	○	719	248	7.50	6.50 - 8.50	7.9
		255 /55 R 18		109	W	○	BLK	TL	○	743	269	8.00	7.00 - 9.00	7.9
11	60	235 /60 R 18		107	W	○	BLK	TL	○	745	244	7.00	6.50 - 8.50	7.9
	65	235 /65 R 18		106	W	○	BLK	TL	○	769	243	7.00	6.50 - 8.50	7.9
	55	235 /55 R 17		103	W	○	BLK	TL	○	694	248	7.50	6.50 - 8.50	7.9
10	60	235 /60 R 17		102	W	○	BLK	TL	○	720	244	7.00	6.50 - 8.50	7.9
	65	235 /65 R 17		108	W	○	BLK	TL	○	744	243	7.00	6.50 - 8.50	7.9

AZENIS FK453CC

- For all drivers expecting high speed stability and good safety performance driving on SUV, especially CUV, combined with comfort.
- To achieve high speed handling and stability, new Falken high loaded silica hard tread compound has been adopted.
- 3 wide straight grooves evacuate water effectively.
- Low noise and good handling and stability are achieved by optimized land/sea ratio.



AZENIS FK453CC

Rim (inch)	Aspect ratio (%)	Tire Size	Ply Rating	Load Index	Speed Symbol	XL or RF	Sidewall Style	TL	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
												Measuring	Approved	
22	35	285 /35 R 22		106	W	○	BLK	TL	○	759	294	10.00	9.50 - 11.00	7.5
	20	315 /35 R 20		110	Y	○	BLK	TL	○	728	323	11.00	10.50 - 12.50	7.5
20	40	275 /40 R 20		106	Y	○	BLK	TL	○	725	283	9.50	9.00 - 11.00	7.8
		275 /40 R 20		106	W	○	BLK	TL		728	282	9.50	9.00 - 11.00	8.1
		295 /40 R 20		110	W	○	BLK	TL	○	744	305	10.50	10.00 - 11.50	7.7
	45	245 /45 R 20		103	W	○	BLK	TL	○	728	247	8.00	7.50 - 9.00	8.1
		275 /45 R 20		110	W	○	BLK	TL	○	756	277	9.00	8.50 - 10.50	7.9
	50	255 /50 R 20		109	W	○	BLK	TL	○	764	270	8.00	7.00 - 9.00	8.1
	45	275 /45 R 19		108	Y	○	BLK	TL		731	282	9.00	8.50 - 10.50	7.8
		285 /45 R 19		111	W	○	BLK	TL	○	739	289	9.50	9.00 - 10.50	7.7
	50	255 /50 R 19		107	W	○	BLK	TL	○	738	270	8.00	7.00 - 9.00	8.0
		265 /50 R 19		110	Y	○	BLK	TL	○	749	281	8.50	7.50 - 9.50	7.9
19	55	235 /55 R 19		105	W	○	BLK	TL	○	741	249	7.50	6.50 - 8.50	8.1
		255 /55 R 19		111	V	○	BLK	TL	○	765	273	8.00	7.00 - 9.00	8.1
	50	215 /50 R 18		92	W		BLK	TL	○	672	228	7.00	6.00 - 7.50	8.1
		235 /50 R 18		101	V	○	BLK	TL	○	693	249	7.50	6.50 - 8.50	8.1
245 /50 R 18			100	Y	○	BLK	TL	○	703	257	7.50	7.00 - 8.50	8.1	
18	55	235 /55 R 18		100	V		BLK	TL	○	715	249	7.50	6.50 - 8.50	8.1
		255 /55 R 18		109	W	○	BLK	TL	○	739	272	8.00	7.00 - 9.00	8.1
	60	235 /60 R 18		107	W	○	BLK	TL	○	737	244	7.00	6.50 - 8.50	8.1
		255 /60 R 18		112	W	○	BLK	TL	○	763	264	7.50	7.00 - 9.00	8.1
	17	55	235 /55 R 17		103	W	○	BLK	TL	○	690	249	7.50	6.50 - 8.50
245 /55 R 17				102	W		BLK	TL		702	257	7.50	7.00 - 8.50	8.1
65		235 /65 R 17		108	V	○	BLK	TL	○	742	248	7.00	6.50 - 8.50	7.9

ZIEX S/TZ05

- ZIEX S/TZ05 is an all season tire, especially for highway use for SUV and Pick-Up truck with "inch up" sizes in 20", 22" & 24"
- New tread compound enables better wear-resistance and grip performance.
- Enhanced stiffness, water evacuation, and noise reduction.



ZIEX S/TZ05

Rim (inch)	Aspect ratio (%)	Tire Size	Ply Rating	Load Index	Speed Symbol	XL or RF	Sidewall Style	TL	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
												Measuring	Approved	
24	35	295 /35 R 24		110	H	○	BLK	TL		814	293	10.50	10.00 - 11.50	10.8
		305 /35 R 24		112	H	○	BLK	TL		823	304	11.00	10.00 - 12.00	10.8
22	35	265 /35 R 22		102	H	○	BLK	TL		749	264	9.50	9.00 - 10.50	10.4
	40	265 /40 R 22		106	H	○	BLK	TL	○	771	270	9.50	9.00 - 10.50	10.4
		285 /40 R 22		110	H	○	BLK	TL		788	287	10.00	9.50 - 11.00	10.8
		305 /40 R 22		114	H	○	BLK	TL		803	310	11.00	10.00 - 12.00	10.8
	45	285 /45 R 22		114	H	○	BLK	TL		815	278	9.50	9.00 - 10.50	10.8
20		305 /45 R 22		118	H	○	BLK	TL		831	302	10.00	9.50 - 11.50	10.8
	40	275 /40 R 20		106	H	○	BLK	TL	○	727	276	9.50	9.00 - 11.00	10.4
	45	275 /45 R 20		110	H	○	BLK	TL	○	754	268	9.00	8.50 - 10.50	10.9
		295 /45 R 20		114	H	○	BLK	TL		770	295	10.00	9.50 - 11.00	10.8
	50	245 /50 R 20		102	H		BLK	TL		754	251	7.50	7.00 - 8.50	10.4
		255 /50 R 20		109	H	○	BLK	TL	○	766	259	8.00	7.00 - 9.00	10.4
		265 /50 R 20		111	H	○	BLK	TL	○	774	272	8.50	7.50 - 9.50	10.9
	50	285 /50 R 20		116	V	○	BLK	TL		794	295	9.00	8.00 - 10.00	8.1
		305 /50 R 20		120	H	○	BLK	TL	○	811	314	9.50	8.50 - 11.00	10.9
	55	275 /55 R 20		117	H	○	BLK	TL	○	809	279	8.50	7.50 - 9.50	10.9
19	60	275 /60 R 20		115	H		BLK	TL	○	838	279	8.00	7.50 - 9.50	10.0
	55	245 /55 R 19		103	H		BLK	TL		753	251	7.50	7.00 - 8.50	10.4
	60	255 /60 R 19		109	H		BLK	TL		789	258	7.50	7.00 - 9.00	9.4
18	55	255 /55 R 18		109	V	○	BLK	TL		737	263	8.00	7.00 - 9.00	8.1
	60	235 /60 R 18		107	V	○	BLK	TL		739	236	7.00	6.50 - 8.50	8.1
		265 /60 R 18		110	V		BLK	TL		775	272	8.00	7.50 - 9.50	9.2
17	65	265 /65 R 17		112	T		BLK	TL		776	272	8.00	7.50 - 9.50	10.4

WILDPEAK H/T HT01



- The first Falken real highway tire for SUV and Pick-Up trucks.
- Enhances safety performance, especially wet breaking on city road and highway, besides improvement in mileage and anti-irregular wear.
- Provides a high level of ride comfort and quiet performance.

Rim (inch)	Aspect ratio (%)	Tire Size	Ply Rating	Load Index	Speed Symbol	XL or RF	Sidewall Style	TL	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
												Measuring	Approved	
20	50	285/50 R20		112	V		BLT	TL		794	295	9.00	8.00 - 10.00	8.2
	65	LT 275/65 R20		126/123	S		BLK	TL		866	272	8.00	7.50 - 9.50	12.5
18	60	225/60 R18		100	H		BLK	TL		724	222	6.50	6.00 - 8.00	8.5
		235/60 R18		107	H	○	BLK	TL		740	235	7.00	6.50 - 8.50	10.5
		255/60 R18		112	V	○	BLT	TL		763	258	7.50	7.00 - 9.00	9.3
		265/60 R18		110	H		BLT	TL		775	263	8.00	7.50 - 9.50	9.8
		285/60 R18		116	H		BLT	TL		799	290	8.50	8.00 - 10.00	10.0
	65	235/65 R18		106	H		BLK	TL		763	240	7.00	6.50 - 8.50	9.0
		265/65 R18		114	H		BLK	TL		805	268	8.00	7.50 - 9.50	9.3
		275/65 R18		116	H		BLK	TL		815	274	8.00	7.50 - 9.50	9.4
		LT 275/65 R18		123/120	S		BLK	TL		815	272	8.00	7.50 - 9.00	12.5
	70	255/70 R18		113	H		BLK	TL		817	260	7.50	6.50 - 8.50	8.9
17	60	225/60 R17		99	V		BLK	TL		698	222	6.50	6.00 - 8.00	7.9
		235/60 R17		102	H		BLK	TL		715	235	7.00	6.50 - 8.50	10.5
	65	225/65 R17		102	H		BLT	TL		724	226	6.50	6.00 - 8.00	8.9
		235/65 R17		104	T		BLT	TL	○	740	237	7.00	6.50 - 8.50	9.1
		235/65 R17		108	H	○	BLT	TL		738	238	7.00	6.50 - 8.50	9.0
		245/65 R17		107	S		OWL	TL	○	749	246	7.00	7.00 - 8.50	9.2
		265/65 R17		112	S		BLT	TL	○	773	272	8.00	7.50 - 9.50	9.4
		275/65 R17		115	H		BLT	TL		790	277	8.00	7.50 - 9.50	9.4
		285/65 R17		116	H		BLT	TL		799	289	8.50	8.00 - 10.00	9.6
	70	245/70 R17		110	S		BLT	TL	○	777	246	7.00	6.50 - 8.00	9.3
		265/70 R17		115	S		BLT	TL	○	801	273	8.00	7.00 - 9.00	9.5
		LT 265/70 R17		121/118	S		OWL	TL	○	806	276	8.00	7.00 - 8.50	13.0
16	60	235/60 R16		100	H		BLT	TL		690	236	7.00	6.50 - 8.50	9.5
	65	215/65 R16		98	S		BLK	TL		686	219	6.50	6.00 - 7.50	8.5
	70	215/70 R16		100	S		BLT	TL	○	706	220	6.50	5.50 - 7.00	9.0
		225/70 R16		103	T		BLT	TL	○	721	224	6.50	6.00 - 7.50	9.1
		235/70 R16		106	S		BLT	TL	○	735	243	7.00	6.00 - 8.00	9.2
		245/70 R16		107	S		OWL	TL	○	751	247	7.00	6.50 - 8.00	9.3
		255/70 R16		111	S		BLT	TL	○	765	257	7.50	6.50 - 8.50	9.4
		265/70 R16		112	S		BLT	TL	○	774	272	8.00	7.00 - 9.00	9.5
		275/70 R16		114	H		BLT	TL	○	793	276	8.00	7.00 - 9.00	8.9
		225/75 R16		108	S	○	OWL	TL	○	743	221	6.00	6.00 - 7.50	9.1
		LT 225/75 R16		115/112	S		BLT	TL	○	745	219	6.00	6.00 - 7.00	12.0
		235/75 R16		112	S	○	BLT	TL	○	756	232	6.50	6.00 - 8.00	9.2
15	75	245/75 R16		111	S		OWL	TL	○	772	247	7.00	6.50 - 8.00	9.3
		LT 245/75 R16		120/116	S		BLT	TL	○	774	248	7.00	6.50 - 8.00	12.5
		LT 245/75 R16		108/104	S		BLT	TL	○	774	248	7.00	6.50 - 8.00	12.5
		265/75 R16		116	S		BLT	TL	○	802	269	7.50	7.00 - 9.00	9.5
		LT 265/75 R16		123/120	Q		BLT	TL	○	804	269	7.50	7.00 - 8.00	13.0
		LT 285/75 R16		126/123	S		BLK	TL		834	284	8.00	7.50 - 9.00	13.4
		LT 235/85 R16		120/116	Q		BLT	TL	○	807	233	6.50	6.00 - 7.50	13.0
		30X9.50 R15LT		104	S		OWL	TL	○	751	243	7.50	6.50 - 8.50	12.2
		31X10.50 R15LT		109	S		OWL	TL	○	776	273	8.50	7.00 - 9.00	12.2
	70	205/70 R15		96	T		BLT	TL	○	669	207	6.00	5.00 - 7.00	8.9
		215/70 R15		98	H		BLT	TL		683	219	6.50	5.50 - 7.00	8.5
		225/70 R15		100	S		BLT	TL		697	226	6.50	6.00 - 7.50	9.1
		255/70 R15		108	H		BLK	TL	○	740	254	7.50	6.50 - 8.50	8.9
		255/70 R15		108	T		BLT	TL		739	258	7.50	6.50 - 8.50	9.4
		265/70 R15		112	H		BLT	TL		753	270	8.00	7.00 - 9.00	8.9
		225/75 R15		102	S		OWL	TL	○	718	220	6.00	6.00 - 7.50	9.1
15	75	235/75 R15		109	S		OWL	TL	○	731	234	6.50	6.00 - 8.00	9.2
		LT 235/75 R15		104/101	S	○	OWL	TL	○	732	234	6.50	6.00 - 7.00	12.5

WILDPEAK A/T AT3W

- The WILDPEAK A/T AT3W is engineered for adventure, any time and in any weather.
- It combines aggressive off-road ability and rugged terrain driving without compromise on the pavement.
- An optimized tread design combined with a silica tread compound enables the WILDPEAK A/T AT3W to excel in three areas: wear, winter, and wet performance.

WILDPEAK A/T AT3W



Rim (inch)	Aspect ratio (%)	Tire Size	Ply Rating	Load Index	Speed Symbol	XL or RF	Sidewall Style	TL	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
												Measuring	Approved	
20	55	35X12.50R 20LT		121	R		BLT	TL		879	317	10.00	8.50 - 11.00	15.6
		37X12.50R 20LT		126	R		BLT	TL		928	330	10.00	8.50 - 11.00	15.0
	60	275/55 R20		117	T	○	BLT	TL		811	283	8.50	7.50 - 9.50	10.3
		275/55 R20		113	T		BLT	TL		806	231	6.50	6.00 - 7.50	13.6
	65	LT285/55 R20		122/119	T		BLT	TL		822	285	9.00	8.00 - 10.00	14.6
		LT305/55 R20		121/118	S		BLT	TL		844	312	9.50	8.50 - 11.00	15.1
	65	LT265/60 R20		121/118	S		BLT	TL		826	259	8.00	7.50 - 9.50	14.1
		275/60 R20		115	T		BLT	TL		840	274	8.00	7.50 - 9.50	10.3
	65	LT285/60 R20		125/122	R		BLT	TL		850	290	8.50	8.00 - 10.00	14.0
		LT295/60 R20		126/123	R		BLT	TL		862	297	8.50	8.00 - 10.00	14.5
	65	LT325/60 R20		126/123	S		BLT	TL		898	325	9.50	9.00 - 12.00	15.6
		LT275/65 R20		126/123	S		BLT	TL		866	270	8.00	7.50 - 9.50	14.6
	65	LT285/65 R20		127/124	R		BLT	TL		878	290	8.50	8.00 - 10.00	14.0
		37X12.50R 18LT		128	R		BLT	TL		828	328	10.00	8.50 - 11.00	15.0
18	60	265/60 R18		114	T	○	BLT	TL		776	267	8.00	7.50 - 9.50	10.3
		285/60 R18		120	S		BLT	TL		799	290	8.50	8.00 - 10.00	9.9
	65	LT285/60 R18		118/115	S	○	BLT	TL		799	290	8.50	8.00 - 10.00	14.0
		265/65 R18		114	T		BLT	TL		801	269	8.00	7.50 - 9.50	10.3
	65	LT275/65 R18		123/120	S		BLT	TL		815	273	8.00	7.50 - 9.00	14.6
		275/65 R18		116	T		BLT	TL		815	276	8.00	7.50 - 9.50	10.8
	65	LT275/65 R18		113	S		BLT	TL		806	231	6.50	6.00 - 7.50	13.6
		LT285/65 R18		125/122	S		BLT	TL		827	287	8.50	8.00 - 10.00	14.6
	65	LT305/65 R18		124/121	R		BLT	TL		853	304	9.00	8.50 - 11.00	15.1
		LT325/65 R18		127/124	S		BLT	TL		879	331	9.50	9.00 - 12.00	15.6
	70	255/70 R18		113	T		BLT	TL		815	260	7.50	6.50 - 8.50	10.3
		265/70 R18		116	T		BLT	TL		829	274	8.00	7.00 - 9.00	10.8
	70	LT265/70 R18		124/121	S		BLT	TL		835	273	8.00	7.00 - 9.00	14.1
		LT275/70 R18		125/122	S		BLT	TL		849	280	8.00	7.00 - 8.50	14.6
	70	LT295/70 R18		129/126	R		BLT	TL		871	303	8.50	7.50 - 10.00	14.0
		LT285/75 R18		129/126	R		BLT	TL		885	286	8.00	7.50 - 9.50	14.0
17	65	35X12.50R 17LT		121	R		BLT	TL		883	317	10.00	8.50 - 11.00	15.6
		37X12.50R 17LT		124	R		BLT	TL		928	326	10.00	8.50 - 11.00	15.0
	65	215/65 R17		99	T		BLT	TL		712	221	6.50	6.00 - 7.50	9.9
		245/65 R17		111	T	○	BLT	TL		750	246	7.00	7.00 - 8.50	10.3
	65	255/65 R17		114	T	○	BLT	TL		764	262	7.50	7.00 - 9.00	10.3
		265/65 R17		116	T	○	BLT	TL		776	269	8.00	7.50 - 9.50	10.3
	65	LT265/65 R17		120/117	S		BLT	TL		776	270	8.00	7.50 - 9.50	13.5
		LT285/65 R17		121/118	S		BLT	TL		802	290	8.50	8.00 - 10.00	14.0
	70	LT225/70 R17		110/107	S		BLT	TL		748	231	6.50	6.00 - 7.50	12.6
		LT245/70 R17		119/116	S		BLT	TL		782	248	7.00	6.50 - 8.00	13.6
	70	245/70 R17		114	T	○	BLT	TL		776	248	7.00	6.50 - 8.00	10.3
		255/70 R17		112	T		BLT	TL		790	260	7.50	6.50 - 8.50	10.3
	70	LT265/70 R17		121/118	S		BLT	TL		810	273	8.00	7.00 - 8.50	14.1
		265/70 R17		115	T		BLT	TL		804	274	8.00	7.00 - 9.00	10.8
	70	LT275/70 R17		114/110	S		BLT	TL		823	283	8.00	7.00 - 8.50	14.0
		LT285/70 R17		121/118	S		BLT	TL		838	294	8.50	7.50 - 9.00	14.6
	70	P 285/70 R17		117	T		BLT	TL		832	288	8.50	7.50 - 9.50	10.8
		LT315/70 R17		121/118	S		BLT	TL		880	323	9.50	8.00 - 11.00	15.6
	75	235/75 R17		109	T		BLT	TL		791	230	6.50	6.00 - 8.00	10.9
		LT245/75 R17		121/118	S		BLT	TL		805	242	7.00	6.50 - 7.50	13.6
	75	245/75 R17		112	T		BLT	TL		800	248	7.00	6.50 - 8.00	10.3
		LT285/75 R17		121/118	S		BLT	TL		860	283	8.00	7.50 - 9.50	14.6
	80	LT235/80 R17		120/117	R		BLT	TL		808	231	6.50	6.00 - 7.50	13.6
		LT255/80 R17		121/118	S		BLT	TL		840	253	7.00	6.50 - 8.50	13.5
16	70	235/70 R16		109	T	○	BLT	TL		736	238	7.00	6.00 - 8.00	10.3
		245/70 R16		111	T	○	BLT	TL		753	250	7.00	6.50 - 8.00	9.9
	70	LT245/70 R16		113/110	Q		BLT	TL		750	251	7.00	6.50 - 7.50	13.1
		255/70 R16		115	T	○	BLT	TL		764	260	7.50	6.50 - 8.50	10.3
	70	265/70 R16		112	T		BLT	TL		778	274	8.00	7.00 - 9.00	10.8
		LT265/70 R16		117/114	Q		BLT	TL		778	276	8.00	7.00 - 8.50	13.5
	70	LT305/70 R16		124/121	R		BLT	TL		834	307	9.00	8.00 - 9.50	15.1

Continued next page.

WILDPEAK A/T AT3W

Rim (inch)	Aspect ratio (%)	Tire Size	Ply Rating	Load Index	Speed Symbol	XL or RF	Sidewall Style	TL	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
												Measuring	Approved	
16	75	LT225/75 R16		115/112	S		BLT	TL		744	215	6.00	6.00 - 7.00	13.1
		P 245/75 R16		112	T	○	BLT	TL		774	248	7.00	6.50 - 8.00	10.3
		LT245/75 R16		120/116	S		BLT	TL		774	242	7.00	6.50 - 8.00	13.6
		LT265/75 R16		123/120	S		BLT	TL		804	263	7.50	7.00 - 8.00	14.1
		265/75 R16		116	T		BLT	TL		804	268	7.50	7.00 - 9.00	10.8
		LT285/75 R16		126/123	R		BLT	TL		834	283	8.00	7.50 - 9.00	14.6
		LT315/75 R16		127/124	R		BLT	TL		878	312	8.50	8.00 - 11.00	15.6
15	85	205 R16C		110/108	R		BLT	TL		736	206	6.00	5.50 - 6.50	12.6
		LT235/85 R16		120/116	S		BLT	TL		806	231	6.50	6.00 - 7.50	13.6
		30X9.50 R15LT		104	S		BLT	TL		750	241	7.50	6.50 - 8.50	13.6
		31X10.50 R15LT		109	S		BLT	TL		775	264	8.50	7.00 - 9.00	14.1
		32X11.50 R15LT		113	R		BLT	TL		801	287	9.00	8.00 - 10.00	15.1
		33X12.50 R15LT		108	R		BLT	TL		826	317	10.00	8.50 - 11.00	15.6
		35X12.50 R15LT		113	R		BLT	TL		877	317	10.00	8.50 - 11.00	15.6
15	70	265/70 R15		112	T		BLT	TL		756	274	8.00	7.00 - 9.00	10.4
		235/75 R15		109	T	○	BLT	TL		735	230	6.50	6.00 - 8.00	10.9
		LT235/75 R15		104/101	S		BLT	TL		733	235	6.50	6.00 - 7.00	13.1

WILDPEAK M/T MT01

- Trusted by the pros to take on the harshest conditions, the tough WILDPEAK M/T MT01 is built to get you there and back whether you're on the pavement, mud, snow or rocks.
- The WILDPEAK M/T MT01 features Falken's proprietary three ply DURASPEC™ Sidewall technology developed to sustain the most punishing off-road conditions.



Rim (inch)	Aspect ratio (%)	Tire Size	Ply Rating	Load Index	Speed Symbol	XL or RF	Sidewall Style	TL	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
												Measuring	Approved	
20		33X12.50 R20LT		114	Q		BLK	TL		833	322	10.00	8.50 - 11.00	16.4
		35X12.50 R20LT		121	Q		BLK	TL		883	321	10.00	8.50 - 11.00	16.4
		37X13.50 R20LT		127	Q		BLK	TL		933	345	11.00	8.50 - 11.00	16.4
18	55	LT305/55 R20		121/118	Q		BLK	TL		847	314	9.50	8.50 - 11.00	15.4
		35X12.50 R18LT		123	Q		BLK	TL		881	330	10.00	8.50 - 11.00	16.5
17	65	LT285/65 R18		125/122	Q		BLK	TL		833	295	8.50	8.00 - 10.00	14.9
		LT275/70 R18		125/122	Q		BLK	TL		848	278	8.00	7.00 - 8.50	15.5
17	70	33X12.50 R17LT		120	Q		BLK	TL		831	318	10.00	8.50 - 11.00	16.4
		35X12.50 R17LT		121	Q		BLK	TL		883	331	10.00	8.50 - 11.00	16.4
		37X12.50 R17LT		124	Q		BLK	TL		932	328	10.00	8.50 - 11.00	16.4
		38X13.50 R17LT		119	Q		BLK	TL		972	345	11.00	8.50 - 11.00	16.4
	70	LT265/70 R17		121/118	Q		BLK	TL		805	269	8.00	7.00 - 8.50	15.0
		LT285/70 R17		121/118	Q		BLK	TL		835	290	8.50	7.50 - 9.00	15.5
		LT295/70 R17		121/118	Q		BLK	TL		848	298	8.50	7.50 - 10.00	16.0
16	75	LT315/70 R17		121/118	Q		BLK	TL		880	325	9.50	8.00 - 11.00	15.8
		LT255/75 R17		111/108	Q		BLK	TL		820	258	7.00	6.50 - 8.50	14.4
		LT235/80 R17		120/117	Q		BLK	TL		814	233	6.50	6.00 - 7.50	13.9
		LT245/75 R16		120/116	Q		BLK	TL		773	253	7.00	6.50 - 8.00	14.5
		LT265/75 R16		123/120	Q		BLK	TL		814	270	7.50	7.00 - 8.00	15.0
15	85	LT285/75 R16		126/123	Q		BLK	TL		831	292	8.00	7.50 - 9.00	15.5
		LT315/75 R16		127/124	Q		BLK	TL		881	321	8.50	8.00 - 11.00	16.5
		LT235/85 R16		120/116	Q		BLK	TL		808	235	6.50	6.00 - 7.50	14.4
		30X9.50 R15LT		104	Q		BLK	TL		751	245	7.50	6.50 - 8.50	15.0
		31X10.50 R15LT		109	Q		BLK	TL		781	266	8.50	7.00 - 9.00	15.0
15		33X12.50 R15LT		108	Q		BLK	TL		829	331	10.00	8.50 - 11.00	16.4
		35X12.50 R15LT		113	Q		BLK	TL		876	328	10.00	8.50 - 11.00	16.4



Sample image

LIGHT TRUCK TIRES



Passenger
Car



4x4 (4WD) &
SUV



Light Truck



Truck



Bus

FALKEN

LIGHT TRUCK TIRES

! SAFETY WARNING

SERIOUS INJURY OR DEATH MAY RESULT FROM EXPLOSION OF TIRE/RIM ASSEMBLY, IF PROPER MOUNTING INSTRUCTIONS ARE NOT FOLLOWED.

- ***ONLY** specially trained persons should mount tires.
- ***ALWAYS** match rim diameter with tire diameter.
- ***NEVER** mount a tire on a cracked, bent, rusted or otherwise damaged rim or a rim which has been repaired.
- ***NEVER** put a flammable substance into a tire.
- ***ALWAYS** clean and lubricate the rim and tire beads.
- ***ALWAYS** use an extension air hose with gauge and clip-on air chunk.
- ***ALWAYS** lock the wheel on the tire mounting machine, or place it in a safety cage when inflating.
- ***ALWAYS** stand clear, and **NEVER** lean or reach over the tire/rim assembly when inflating.
- ***NEVER** inflate over 40 psi (275 kPa) to seat bead.
- ***ALWAYS** adjust tire pressure to the vehicle manufacturer's recommendations after beads are fully seated.



LINAM VAN01

- Enhanced durability provided by the sidewall protection band.
- Longer-lasting performance throughout the life of the tire.
- Maximised road contact area through 4DNano Design technology.

LINAM VAN01

Rim (inch)	Aspect ratio (%)	Tire Size	Ply Rating	Load Index	Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
16	60	195/60 R16C		99/97	H	TL	○	FALKEN	640	199	6.00	5.50 - 6.50	8.2
		215/60 R16C		103/101	T	TL	○	FALKEN	664	219	6.50	6.00 - 7.00	8.2
	65	195/65 R16C		104/102	T	TL	○	FALKEN	658	199	6.00	5.50 - 6.00	8.2
		205/65 R16C		107/105	T	TL	○	FALKEN	671	207	6.00	5.50 - 6.50	8.6
		215/65 R16C		109/107	T	TL	○	FALKEN	685	219	6.50	6.00 - 7.00	8.6
		225/65 R16C		112/110	T	TL	○	FALKEN	697	226	6.50	6.00 - 7.00	9.1
		235/65 R16C		115/113	R	TL	○	FALKEN	711	239	7.00	6.50 - 7.50	9.1
	75	185/75 R16C		104/102	R	TL	○	FALKEN	684	182	5.00	5.00 - 6.00	8.2
		195/75 R16C		107/105	T	TL	○	FALKEN	698	194	5.50	5.00 - 6.00	8.6
		205/75 R16C		113/111	R	TL	○	FALKEN	714	201	5.50	5.50 - 6.50	9.1
		215/75 R16C		116/114	R	TL	○	FALKEN	728	214	6.00	5.50 - 7.00	9.6
		225/75 R16C		118/116	R	TL	○	FALKEN	744	221	6.00	6.00 - 7.00	9.6
15	65	205/65 R15C		102/100	T	TL	○	FALKEN	646	207	6.00	5.50 - 6.50	8.2
	70	195/70 R15C		104/102	S	TL	○	FALKEN	655	199	6.00	5.00 - 6.00	8.2
		205/70 R15C		106/104	R	TL	○	FALKEN	669	207	6.00	5.50 - 6.50	8.2
		215/70 R15C		109/107	S	TL	○	FALKEN	683	219	6.50	5.50 - 7.00	8.6
		225/70 R15C		112/110	S	TL	○	FALKEN	697	226	6.50	6.00 - 7.00	9.1
14	65	175/65 R14C		90/88	T	TL	○	FALKEN	583	175	5.00	5.00 - 5.50	8.2
	70	165/70 R14C		89/87	R	TL	○	FALKEN	588	168	5.00	4.50 - 5.00	8.2
		185 R14C		102/100	R	TL	○	FALKEN	650	186	5.50	5.00 - 6.00	8.2
		195 R14C		106/104	R	TL	○	FALKEN	666	196	5.00	5.00 - 6.00	8.2

LINAM R51

- Designed for vans and light trucks, featuring a six-rib pattern.
- Excellent wear resistance, durability and performance in wet conditions.

LINAM R51



R2

Rim (inch)	Aspect ratio (%)	Tire Size	Ply Rating	Load Index	Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
16	60	195/60 R16C		99/97	T	TL	○	FALKEN	638	196	6.00	5.50 - 6.50	9.6
	65	195/65 R16C		104/102	T	TL	○	FALKEN	659	197	6.00	5.00 - 6.00	9.6
		205/65 R16C		107/105	T	TL	○	FALKEN	671	204	6.00	5.50 - 6.50	9.6
		215/65 R16C		106/104	S	TL		FALKEN	688	216	6.50	6.00 - 7.00	9.6
		225/65 R16C		112/110	T	TL	○	FALKEN	696	225	6.50	6.00 - 7.00	10.1
	70	215/70 R16C		108/106	S	TL		FALKEN	709	218	6.50	5.50 - 7.00	10.1
15	75	185/75 R16C		104/102	R	TL	○	FALKEN	692	181	5.00	5.00 - 6.00	11.0
		195/75 R16C		107/105	T	TL	○	FALKEN	705	192	5.50	5.00 - 6.00	11.0
		205/75 R16C		110/108	R	TL	○	FALKEN	721	198	5.50	5.50 - 6.50	11.0
		215/75 R16C		113/111	R	TL		FALKEN	726	216	6.00	5.50 - 7.00	10.6
	70	205/65 R15C		102/100	T	TL	○	FALKEN	647	206	6.00	5.50 - 6.50	9.6
		195/70 R15C		104/102	R	TL	○	FALKEN	654	190	6.00	5.00 - 6.00	10.1
14	70	205/70 R15C		106/104	R	TL		FALKEN	669	207	6.00	5.00 - 6.50	10.1
		215/70 R15C		109/107	S	TL		FALKEN	685	218	6.50	5.50 - 7.00	10.1
		225/70 R15C		112/110	R	TL	○	FALKEN	696	226	6.50	6.00 - 7.00	10.8
		*195 R15C	8	106/104	R	TL	○	OHTSU	691	194	5.50	5.00 - 6.00	9.6
	65	175/65 R14C		90/88	T	TL	○	FALKEN	583	171	5.00	5.00 - 5.50	9.1
		165/70 R14C		89/87	R	TL	○	FALKEN	586	167	5.00	4.50 - 5.00	9.1
13	70	165 R14C	6	93/91	P	TL	○	FALKEN	622	168	4.50	4.00 - 5.00	8.0
		165 R14C	8	97/95	P	TL	○	FALKEN	622	168	4.50	4.00 - 5.00	8.0
		175 R14C	8	99/98	P	TL	○	FALKEN	634	180	5.00	4.50 - 5.50	8.3
		185 R14C	6	99/97	P	TL	○	FALKEN	648	190	5.50	5.00 - 6.00	9.2
	65	185 R14C	8	102/100	P	TL	○	FALKEN	650	188	5.50	5.00 - 6.00	9.2
		195 R14C	8	106/104	P	TL	○	FALKEN	667	196	5.50	5.00 - 6.00	9.2
12	70	155 R13C	6	85/83	P	TL	○	FALKEN	579	160	4.50	4.00 - 5.00	7.7
		165 R13C	6	91/89	P	TL	○	FALKEN	595	169	4.50	4.00 - 5.00	8.0
		165 R13C	8	94/92	P	TL	○	FALKEN	595	169	4.50	4.00 - 5.00	8.0
		175 R13C	6	94/92	P	TL	○	FALKEN	608	179	5.00	4.50 - 5.50	8.3
	65	175 R13C	8	97/95	P	TL	○	FALKEN	608	179	5.00	4.50 - 5.50	8.3
		145 R12C	6	81/79	P	TL	○	FALKEN	540	141	4.00	3.50 - 4.50	7.5
12	65	155 R12C	6	83/81	P	TL	○	FALKEN	552	159	4.50	4.00 - 5.00	7.7
		155 R12C	8	88/86	P	TL	○	FALKEN	552	159	4.50	4.00 - 5.00	7.7

*: R2



GI-377

- Rib/lug pattern designed for all-position highway use.
- Excellent traction, long mileage, and enhanced resistance to irregular wear.

**GI-377****GI327**

Rim (inch)	Aspect ratio (%)	Tire Size	Ply Rating	Load Index	Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
16		7.50 R16		122/120	L	TT		FALKEN	808	217	6.00	6.00	14.9
		7.50 R16	14			TT		FALKEN	809	213	6.00	6.00	15.1
		* 8.25 R16	14			TT		OHTSU	857	233	6.50	6.00,6.50	15.5

*: GI327

RI-103

- General purpose, all-position tires for highway service.
- Long service life and excellent steering stability.

**RI-103****R1300**

Rim (inch)	Aspect ratio (%)	Tire Size	Ply Rating	Load Index	Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
16		6.50 R16C	10	108/107	M		○	OHTSU	752	189	5.50	4.50,5.50	10.5
		6.50 R16	10	109/107	M			OHTSU	752	189	5.50	4.50,5.50	10.5
		7.00 R16		117/116	N			OHTSU	779	202	5.50	5.00 - 6.50	11.0
		* 7.50 R16		121/120	N			OHTSU	806	213	6.00	5.50 - 7.00	11.0
15		7.00 R15	10	111/109	M		○	OHTSU	752	198	5.50	5.50	11.0

*: R1300



Sample image

TRUCK and BUS TIRES



Passenger
Car



4x4 (4WD) &
SUV



Light Truck



Truck



Bus

FALKEN



TRUCK and BUS TIRES



SAFETY WARNING

SERIOUS INJURY OR DEATH MAY RESULT FROM EXPLOSION OF TIRE/RIM ASSEMBLY IF PROPER MOUNTING INSTRUCTIONS ARE NOT FOLLOWED.

- ***ONLY** specially trained persons should mount tires.
- ***ALWAYS** match rim diameter with appropriate tire size.
- ***NEVER** mount a tire on a cracked, bent, rusted or otherwise damaged rim or a rim which has been repaired.
- ***NEVER** put a flammable substance into a tire.
- ***ALWAYS** clean and lubricate the rim and tire beads.
- ***ALWAYS** use an extension air hose with gauge and clip-on air chuck.
- ***ALWAYS** lock the wheel on the tire mounting machine, or place it in a safety cage when inflating.
- ***ALWAYS** stand clear, and **NEVER** lean or reach over the tire/rim assembly when inflating.
- ***NEVER** inflate over 40 psi (275 kPa) to seat beads.
- ***ALWAYS** adjust tire pressure to the vehicle manufacturer's recommendations after beads are fully seated.



CATEGORY		ON ROAD												ON-OFF ROAD				OFF ROAD
PATTERN																		
Application for Truck	Steer	⊙	⊙	⊙	⊙					○		○						
	All position	○	○	○	○					⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	
	Drive					⊙	⊙	⊙	⊙									⊙
	Trailer	○	○	○	○					○								
Application for Bus type	InCity										○							
	Intercity																	
Distance	Long	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	○		⊙	⊙	○	○	○	⊙	○
	Middle	○	○		○		○	○		⊙		⊙	⊙	○	○	○	⊙	○
	Short	○	○								⊙		○	⊙	⊙	⊙		⊙
Tubeless	8.5R17.5																	
	9.5R17.5	○			○													
	10R17.5																	
	225/90R17.5											○						
	225/80R17.5												○			○		
	205/75R17.5																	
	215/75R17.5		○		○		○											
	225/75R17.5																	
	235/75R17.5						○											
	245/70R17.5																	
	8R19.5																	
	225/70R19.5																	
	245/70R19.5		○		○													
	265/70R19.5		○		○													
	285/70R19.5																	
	425/55R19.5																	
	9R22.5		○															
	10R22.5		○															
	11R22.5		○	○		○	○					○	○			○		
	12R22.5	○		○		○	○	○	○	○			○		○	○		○
	13R22.5																○	
	275/80R22.5																	
	295/80R22.5	○	○		○		○	○										
	315/80R22.5	○	○		○		○	○								○	○	○
	245/75R22.5																	
	295/75R22.5																	
	255/70R22.5	○																
	275/70R22.5		○	○							○							
	315/70R22.5		○				○											
	385/65R22.5	○	○		○													
	425/65R22.5																	
	445/65R22.5																	
	295/60R22.5																	
	315/60R22.5																	
	265/60R22.5																	
	385/55R22.5																	
	11R24.5																	
	12R24.5																	
	285/75R24.5																	
Tube Type	7.50R15																	
	8.25R15																	
	10.00R15																	
	7.50R16												○					
	8.25R16											○						
	7.50R18																	
	8.25R20																	
	9.00R20																	
	10.00R20		○	○										○				
	11.00R20														○			
	12.00R20																	
	365/80R20	○																
	11.00R22																	
	11.00R24																	
	12.00R24																○ EX	
	325/95R24 (TL)																	



TRUCK and BUS TIRES APPLICATION

For Middle East *not for all countries by tire standard and specifications.

CATEGORY		ON ROAD										
PATTERN		RI-117	RI-128	RI150	RI151	BI-807D	BI-851	BI852	BI-867	GI-327	GI-377	MI-527
Application for Truck	Steer	⊙	⊙	⊙	⊙					○		○
	All position	○	○	○	○					⊙	⊙	⊙
	Drive					⊙	⊙	⊙	⊙			
	Trailer	○	○	○	○							
Application for Bus type	InCity											
	Intercity											
Distance	Long	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙			○
	Middle	○	○		○		○	○	○	⊙	⊙	⊙
	Short	○	○								○	○
Tubeless	8.5R17.5	○			○							
	9.5R17.5	○			○							
	10R17.5											
	225/90R17.5									○		
	225/80R17.5										○	
	205/75R17.5				○							
	215/75R17.5		○		○			○				
	225/75R17.5											
	235/75R17.5				○			○				
	245/70R17.5				○							
	8R19.5											
	225/70R19.5											
	245/70R19.5		○		○							
	265/70R19.5		○		○							
	285/70R19.5				○							
	425/55R19.5											
	9R22.5											
	10R22.5		○									
	11R22.5		○	○								
	12R22.5					○						
	13R22.5											
	275/80R22.5											
	295/80R22.5	○	○		○							
	315/80R22.5	○	○		○			○	○			
	245/75R22.5											
	295/75R22.5											
	255/70R22.5											
	275/70R22.5		○	○								
	315/70R22.5				○			○				
	385/65R22.5	○	○		○							
	425/65R22.5											
	445/65R22.5											
	295/60R22.5											
	315/60R22.5				○							
	265/60R22.5											
	385/55R22.5		○									
	11R24.5											
	12R24.5											
	285/75R24.5											
Tube Type	7.50R15											
	8.25R15											
	10.00R15											
	7.50R16										○	
	8.25R16									○		
	7.50R18											
	8.25R20											
	9.00R20		○									
	10.00R20		○	○								
	11.00R20											
	12.00R20											
	365/80R20	○										
	11.00R22											
	11.00R24											
	12.00R24		○	○								
	325/95R24 (TL)											



CATEGORY		ON ROAD			ON-OFF ROAD						OFF ROAD		
PATTERN		R1200	R3500	MI-577	RI-129	GI-307	R3100	GI-337	GI-347	GI-388	R3200	LI-257	
Application for Truck	Steer	○	○										
	All position	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙		
	Drive											⊙	
	Trailer												
Application for Bus type	InCity												
	Intercity												
Distance	Long												
	Middle	⊙	⊙	○	⊙	⊙	⊙	○	○	○		○	
	Short			⊙				⊙	⊙	⊙	⊙	⊙	
Tubeless	8.5R17.5												
	9.5R17.5												
	10R17.5												
	225/90R17.5			○									
	225/80R17.5												
	205/75R17.5												
	215/75R17.5												
	225/75R17.5												
	235/75R17.5												
	245/70R17.5												
	8R19.5												
	225/70R19.5												
	245/70R19.5												
	265/70R19.5												
	285/70R19.5												
	425/55R19.5												
	9R22.5												
	10R22.5		○										
	11R22.5	○											
	12R22.5	○*								○			
	13R22.5					○				○			
	275/80R22.5									○			
	295/80R22.5												
	315/80R22.5				○	○				○		○	
	245/75R22.5												
	295/75R22.5												
	255/70R22.5												
	275/70R22.5												
	315/70R22.5												
	385/65R22.5												
	425/65R22.5												
	445/65R22.5												
	295/60R22.5												
	315/60R22.5												
	265/60R22.5												
	385/55R22.5												
	11R24.5												
	12R24.5												
	285/75R24.5												
Tube Type	7.50R15												
	8.25R15												
	10.00R15												
	7.50R16									○			
	8.25R16												
	7.50R18												
	8.25R20												
	9.00R20	○	○										
	10.00R20	○						○					
	11.00R20	○							○				
	12.00R20				○		○			○			
	365/80R20												
	11.00R22												
	11.00R24												
	12.00R24				○	○ EX				○			
	325/95R24 (TL)				○					○			

○*=R1200D ○ EX=GI307EX



TRUCK and BUS TIRES APPLICATION

For Africa *not for all countries by tire standard and specifications.

CATEGORY		ON ROAD										
PATTERN		RI-117	RI-128	RI150	RI151	BI-807D	BI-851	BI852	BI-867	RI-188	GI-377	R1200
Application for Truck	Steer	⊙	⊙	⊙	⊙					○		○
	All position	○	○	○	○					⊙	⊙	⊙
	Drive					⊙	⊙	⊙	⊙			
	Trailer	○	○	○	○					○		
Application for Bus type	InCity											
	Intercity											
Distance	Long	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	○		
	Middle	○	○		○		○	○	○	⊙	⊙	⊙
	Short	○	○								○	
Tubeless	8.5R17.5	○			○							
	9.5R17.5	○			○							
	10R17.5											
	225/90R17.5											
	225/80R17.5											
	205/75R17.5				○		○					
	215/75R17.5		○		○		○	○				
	225/75R17.5											
	235/75R17.5		○		○			○				
	245/70R17.5											
	8R19.5											
	225/70R19.5											
	245/70R19.5		○									
	265/70R19.5		○		○							
	285/70R19.5											
	425/55R19.5											
	9R22.5											
	10R22.5		○	○								
	11R22.5		○	○				○			○	○
	12R22.5	○		○		○				○		○
	13R22.5											
	275/80R22.5		○									
	295/80R22.5	○	○		○			○				
	315/80R22.5	○	○		○			○	○			
	245/75R22.5											
	295/75R22.5											
	255/70R22.5			○								
	275/70R22.5		○	○								
	315/70R22.5		○					○				
	385/65R22.5	○	○		○							
	425/65R22.5											
	445/65R22.5											
	295/60R22.5											
	315/60R22.5											
	265/60R22.5											
	385/55R22.5											
	11R24.5											
	12R24.5											
	285/75R24.5											
Tube Type	7.50R15											
	8.25R15											
	10.00R15											
	7.50R16										○	
	8.25R16											
	7.50R18											
	8.25R20											
	9.00R20											
	10.00R20			○								○
	11.00R20											○
	12.00R20											
	365/80R20	○										
	11.00R22											
	11.00R24											
	12.00R24		○	○								
	325/95R24 (TL)											



CATEGORY		ON ROAD	ON-OFF ROAD					OFF ROAD
PATTERN		R3500	GI-307	R3100	RI-129	GI-347	GI-388	LI-257
Application for Truck	Steer	○						
	All position	⊙	⊙	⊙	⊙	⊙	⊙	
	Drive							⊙
	Trailer							
Application for Bus type	InCity							
	Intercity							
Distance	Long							
	Middle	⊙	⊙	⊙	⊙	○	○	○
	Short					⊙	⊙	⊙
Tubeless	8.5R17.5							
	9.5R17.5							
	10R17.5							
	225/90R17.5							
	225/80R17.5							
	205/75R17.5							
	215/75R17.5							
	225/75R17.5							
	235/75R17.5							
	245/70R17.5							
	8R19.5							
	225/70R19.5							
	245/70R19.5							
	265/70R19.5							
	285/70R19.5							
	425/55R19.5							
	9R22.5							
	10R22.5							
	11R22.5						○	
	12R22.5					○	○	○
	13R22.5		○				○	○
	275/80R22.5							
	295/80R22.5							
	315/80R22.5		○		○		○	○
	245/75R22.5							
	295/75R22.5							
	255/70R22.5							
	275/70R22.5							
	315/70R22.5							
	385/65R22.5							
	425/65R22.5							
	445/65R22.5							
	295/60R22.5							
	315/60R22.5							
	265/60R22.5							
	385/55R22.5							
	11R24.5							
	12R24.5							
	285/75R24.5							
Tube Type	7.50R15							
	8.25R15							
	10.00R15							
	7.50R16						○	
	8.25R16							
	7.50R18							
	8.25R20							
	9.00R20	○						
	10.00R20							
	11.00R20					○		
	12.00R20			○	○		○	
	365/80R20							
	11.00R22							
	11.00R24							
	12.00R24		○ EX				○	
	325/95R24 (TL)						○	

○ EX=GI307EX



TRUCK and BUS TIRES APPLICATION

For South America *not for all countries by tire standard and specifications.

CATEGORY		ON ROAD									
PATTERN		RI-117	RI-128	RI150	RI151	BI850	BI-851	BI-867	BI852	RI-188	GI-327
Application for Truck	Steer	⊙	⊙	⊙	⊙					○	○
	All position	○	○	○	○					⊙	⊙
	Drive					⊙	⊙	⊙	⊙		
	Trailer	○	○	○	○					○	
Application for Bus type	InCity										
	Intercity										
Distance	Long	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	○	
	Middle	○	○		○		○	○	○	⊙	⊙
	Short	○	○								
Tubeless	8.5R17.5										
	9.5R17.5										
	10R17.5										
	225/90R17.5										
	225/80R17.5										
	205/75R17.5						○				
	215/75R17.5		○		○		○		○		
	225/75R17.5						○				
	235/75R17.5				○				○		
	245/70R17.5										
	8R19.5										
	225/70R19.5										
	245/70R19.5										
	265/70R19.5										
	285/70R19.5										
	425/55R19.5										
	9R22.5										
	10R22.5		○	○							
	11R22.5		○	○		○			○		
	12R22.5			○					○	○	
	13R22.5										
	275/80R22.5		○								
	295/80R22.5		○		○			○	○		
	315/80R22.5				○				○		
	245/75R22.5										
	295/75R22.5										
	255/70R22.5	○		○							
	275/70R22.5		○	○							
	315/70R22.5								○		
	385/65R22.5		○		○						
	425/65R22.5										
	445/65R22.5										
	295/60R22.5										
	315/60R22.5										
	265/60R22.5										
	385/55R22.5										
	11R24.5					○					
	12R24.5										
	285/75R24.5										
Tube Type	7.50R15										
	8.25R15										
	10.00R15										
	7.50R16										
	8.25R16										
	7.50R18										
	8.25R20										
	9.00R20										
	10.00R20		○	○							
	11.00R20										
	12.00R20										
	365/80R20										
	11.00R22										
	11.00R24										
	12.00R24										
	325/95R24 (TL)										



CATEGORY		ON ROAD			ON-OFF ROAD					OFF ROAD
PATTERN		GI-377	GI-378	R1200	GI-307	GI-337	GI-347	GI-388	R3200	LI-257
Application for Truck	Steer			○						
	All position	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	
	Drive									⊙
	Trailer									
Application for Bus type	InCity									
	Intercity									
Distance	Long									
	Middle	⊙	⊙	⊙	⊙	○	○	○		○
	Short	○				⊙	⊙	⊙	⊙	⊙
Tubeless	8.5R17.5									
	9.5R17.5									
	10R17.5									
	225/90R17.5									
	225/80R17.5									
	205/75R17.5									
	215/75R17.5									
	225/75R17.5									
	235/75R17.5									
	245/70R17.5									
	8R19.5									
	225/70R19.5									
	245/70R19.5									
	265/70R19.5									
	285/70R19.5									
	425/55R19.5									
	9R22.5									
	10R22.5									
	11R22.5	○						○	○	
	12R22.5							○		
	13R22.5									
	275/80R22.5									
	295/80R22.5							○		
	315/80R22.5				○			○		
	245/75R22.5									
	295/75R22.5									
	255/70R22.5									
	275/70R22.5									
	315/70R22.5									
	385/65R22.5									
	425/65R22.5		○							
	445/65R22.5									
	295/60R22.5									
	315/60R22.5									
	265/60R22.5									
	385/55R22.5									
	11R24.5									
	12R24.5									
	285/75R24.5									
Tube Type	7.50R15									
	8.25R15									
	10.00R15									
	7.50R16	○								
	8.25R16									
	7.50R18									
	8.25R20									
	9.00R20			○						
	10.00R20					○				
	11.00R20									
	12.00R20									
	365/80R20									
	11.00R22									
	11.00R24									
	12.00R24				○ EX					
	325/95R24 (TL)									



TRUCK and BUS TIRES APPLICATION

For Oceania *not for all countries by tire standard and specifications.

CATEGORY		ON ROAD							
PATTERN		RI-128	RI150	RI151	RI-158	BI850	BI-851	BI852	RI190
Application for Truck	Steer	⊙	⊙	⊙	⊙				
	All position	○	○	○	○				⊙
	Drive					⊙	⊙	⊙	
	Trailer	○	○	○					
Application for Bus type	InCity								○
	Intercity								
Distance	Long	⊙	⊙	⊙	⊙	⊙	⊙	⊙	
	Middle	○		○	○		○	○	
	Short	○			○				⊙
Tubeless	8.5R17.5								
	9.5R17.5			○					
	10R17.5								
	225/90R17.5				○				
	225/80R17.5				○				
	205/75R17.5			○			○		
	215/75R17.5	○		○			○	○	
	225/75R17.5								
	235/75R17.5	○		○			○		
	245/70R17.5								
	8R19.5								
	225/70R19.5			○					
	245/70R19.5	○							
	265/70R19.5	○		○			○		
	285/70R19.5								
	425/55R19.5								
	9R22.5								
	10R22.5	○							
	11R22.5	○	○			○		○	
	12R22.5								
	13R22.5								
	275/80R22.5								
	295/80R22.5	○		○			○	○	
	315/80R22.5	○		○					
	245/75R22.5								
	295/75R22.5								
	255/70R22.5	○	○						
	275/70R22.5	○	○						○
	315/70R22.5								
	385/65R22.5	○		○					
	425/65R22.5								
	445/65R22.5								
	295/60R22.5								
	315/60R22.5								
	265/60R22.5								
	385/55R22.5								
Tube Type	11R24.5								
	12R24.5								
	285/75R24.5								
	7.50R15								
	8.25R15								
	10.00R15								
	7.50R16								
	8.25R16								
	7.50R18								
	8.25R20								
	9.00R20	○							
	10.00R20								
	11.00R20								
	12.00R20								
	365/80R20								
	11.00R22								
	11.00R24								
	12.00R24								
	325/95R24 (TL)								



CATEGORY		ON ROAD				ON-OFF ROAD	
PATTERN		GI-327	GI-377	R1200	MI-577	GI-388	R3200
Application for Truck	Steer	○		○			
	All position	⊙	⊙	⊙	⊙	⊙	⊙
	Drive						
	Trailer						
Application for Bus type	InCity						
	Intercity						
Distance	Long						
	Middle	⊙	⊙	⊙	○	○	
	Short		○		⊙	⊙	⊙
Tubeless	8.5R17.5						
	9.5R17.5						
	10R17.5						
	225/90R17.5	○			○		
	225/80R17.5		○			○	
	205/75R17.5						
	215/75R17.5						
	225/75R17.5						
	235/75R17.5						
	245/70R17.5						
	8R19.5						
	225/70R19.5						
	245/70R19.5						
	265/70R19.5					○	
	285/70R19.5						
	425/55R19.5						
	9R22.5						
	10R22.5						
	11R22.5		○	○		○	○
	12R22.5						
	13R22.5						
	275/80R22.5						
	295/80R22.5					○	
	315/80R22.5					○	
	245/75R22.5						
	295/75R22.5						
	255/70R22.5						
	275/70R22.5					○	
	315/70R22.5						
	385/65R22.5						
	425/65R22.5						
	445/65R22.5						
	295/60R22.5						
	315/60R22.5						
	265/60R22.5						
	385/55R22.5						
	11R24.5						
	12R24.5						
	285/75R24.5						
Tube Type	7.50R15						
	8.25R15						
	10.00R15						
	7.50R16		○			○	
	8.25R16						
	7.50R18						
	8.25R20						
	9.00R20						
	10.00R20			○			
	11.00R20						
	12.00R20						
	365/80R20						
	11.00R22						
	11.00R24						
	12.00R24						
	325/95R24 (TL)						



RI128

► HIGHWAY SERVICE

- Rib pattern designed for sure steering and trailer axle highway use.
- Excellent wear resistance, durability, and handling at high speed.
- Excellent stability on wet surfaces.



RI-128

Rim (inch)	Aspect ratio (%)	Tire Size		Ply Rating	Load Index	Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width [code]		Tread Depth (mm)
												Measuring	Approved	
24.5	75	11R 24.5			149/146	L	TL	○	FALKEN	1107	286	8.25	7.50 - 8.25	16.2
		285 /75R 24.5	16		147/144	L	TL		FALKEN	1056	270	8.25	7.50 - 9.00	16.2
24		12.00R 24	18		156/153	K	TT	○	FALKEN	1213	317	8.50	8.00 - 9.00	14.4
22.5		10R 22.5	14		144/142	L	TL	○	FALKEN	1018	255	7.50	6.75 - 7.50	13.0
		11R 22.5			148/145	M	TL	○	FALKEN	1049	279	8.25	7.50 - 8.25	16.2
	55	385 /55R 22.5			160	K	TL	○	FALKEN	1006	382	12.25	11.75 - 12.25	15.1
	60	315 /60R 22.5			152/148	L	TL	○	FALKEN	956	313	9.75	9.00 - 9.75	12.7
	65	385 /65R 22.5			160 [158]	K(L)	TL	○	FALKEN	1073	377	11.75	11.75 - 12.25	16.5
	70	275 /70R 22.5			148/145	M	TL	○	FALKEN	959	274	8.25	7.50 - 8.25	13.5
		315 /70R 22.5			152/148(154/150)	M(L)	TL	○	FALKEN	1018	314	9.00	9.00 - 9.75	14.8
	80	275 /80R 22.5	16		149/146	L	TL	○	FALKEN	1022	278	8.25	7.50 - 8.25	16.2
		295 /80R 22.5			152/148	M	TL	○	FALKEN	1050	304	9.00	8.25 - 9.00	15.3
		315 /80R 22.5	18		154/150	M	TL	○	FALKEN	1074	314	9.00	9.00 - 9.75	15.4
20		9.00R 20	14		140/137	K	TT	○	FALKEN	1014	261	7.00	6.50 - 7.00	13.0
		10.00R 20	16		147/143	K	TT	○	FALKEN	1047	279	7.50	7.00 - 8.00	13.5
19.5	70	225 /70R 19.5	14		128/126	M	TL		FALKEN	811	224	6.75	6.00 - 6.75	12.5
		245 /70R 19.5			140/138	J	TL	○	FALKEN	842	247	7.50	6.75 - 7.50	12.4
		245 /70R 19.5			136/134	M	TL	○	FALKEN	842	247	7.50	6.75 - 7.50	12.4
		265 /70R 19.5			143/141	J	TL	○	FALKEN	869	252	7.50	7.50 - 8.25	13.3
		265 /70R 19.5			140/138	M	TL	○	FALKEN	869	252	7.50	7.50 - 8.25	13.3
		285 /70R 19.5	16		146/144	M	TL	○	FALKEN	893	288	8.25	7.50 - 9.00	13.6
17.5	75	215 /75R 17.5			126/124	M	TL	○	FALKEN	774	211	6.00	6.00 - 6.75	12.5
		215 /75R 17.5	16		135/133	J	TL	○	FALKEN	773	213	6.00	6.00 - 6.75	12.5

RI150

► HIGHWAY SERVICE

- A steer axle tire designed to maximize mileage.
- A wavy outside shoulder groove helps to prevent cracking.



RI 150

Rim (inch)	Aspect ratio (%)	Tire Size		Ply Rating	Load Index	Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width [code]		Tread Depth (mm)
												Measuring	Approved	
24		12.00R 24			160/156	L	TT	○	FALKEN	1216	315	8.50	8.00 - 9.00	14.9
22.5		10R 22.5	16		144/142	L	TL	○	FALKEN	1022	258	7.50	6.75 - 8.25	15.2
		11R 22.5	16		148/145	L	TL	○	FALKEN	1051	281	8.25	7.50 - 8.25	15.5
		12R 22.5	18		152/149	M	TL	○	FALKEN	1080	307	9.00	9.00 - 9.75	15.1
		255 /70R 22.5	16		140/137	M	TL	○	FALKEN	931	250	7.50	6.75 - 8.25	15.0
	70	275 /70R 22.5	18		148/145	M	TL	○	FALKEN	968	282	8.25	7.50 - 8.25	16.7
20		10.00R 20			147/143	L	TT	○	FALKEN	1053	278	8.25	6.75 - 8.25	15.5

RI151

► HIGHWAY SERVICE

- The RI151 tire is built with a wide tread surface for a stable drive to boost driver confidence.
- An innovative tread compound adds high mileage capability to minimize tire maintenance, and wide outside shoulder ribs were designed to help prevent irregular wear.
- This regional-use tire was created to deliver dependable service for a wide range of on-highway applications.



RI151

Rim (inch)	Aspect ratio (%)	Tire Size	Ply Rating	Load Index	Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
22.5	55	385 /55R 22.5		160(158)	K(L)	TL	○	FALKEN	996	401	12.25	11.75 - 12.25	15.1
	60	315 /60R 22.5		152/148	L	TL	○	FALKEN	957	314	9.75	9.00 - 9.75	12.7
	65	385 /65R 22.5	20	160(158)	K(L)	TL	○	FALKEN	1072	405	11.75	11.75 - 12.25	14.4
	70	*315 /70R 22.5		154/150(152/148)	L(M)	TL	○	FALKEN	1014	318	9.00	9.00 - 9.75	13.9
	80	295 /80R 22.5	18	154/149	M	TL	○	FALKEN	1052	307	9.00	8.25 - 9.00	15.6
19.5		315 /80R 22.5	18	156/150(154/150)	L(M)	TL	○	FALKEN	1078	315	9.00	9.00 - 9.75	17.0
	70	225 /70R 19.5	14	128/126	L	TL	○	FALKEN	809	225	6.75	6.00 - 6.75	12.5
		245 /70R 19.5	16	136/134	M	TL	○	FALKEN	839	258	7.50	6.75 - 7.50	12.8
		265 /70R 19.5	14	140/138	M	TL	○	FALKEN	868	256	7.50	6.75 - 8.25	12.8
		285 /70R 19.5		146/144	M	TL	○	FALKEN	895	294	8.25	7.50 - 9.00	13.4
17.5		8.5R 17.5		121/120	L	TL	○	FALKEN	803	209	6.00	5.25 - 6.75	11.5
		9.5R 17.5	18	143/141	(K)	TL	○	FALKEN	846	238	6.75	6.00 - 6.75	12.0
	70	245 /70R 17.5		136/134	M	TL	○	FALKEN	794	241	7.50	6.75 - 7.50	12.4
	75	205 /75R 17.5		124/122	M	TL	○	FALKEN	759	204	6.00	5.25 - 6.75	11.5
		215 /75R 17.5	14	126/124	M	TL	○	FALKEN	771	212	6.00	6.00 - 6.75	12.0
		235 /75R 17.5	16	132/130	M	TL	○	FALKEN	797	242	6.75	6.75 - 7.50	13.1

* :RI151S

BI850

► HIGHWAY SERVICE

- Wide and deep tread designed for long life.
- Drive axle tire designed for on-road use.
- Improved stone ejection and chipping resistance performance.



BI850

Rim (inch)	Aspect ratio (%)	Tire Size	Ply Rating	Load Index	Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
24.5		11R 24.5	16	149/146	L	TL		FALKEN	1124	283	8.25	7.50 - 8.25	22.2
22.5		11R 22.5	16	148/145	L	TL	○	FALKEN	1070	282	8.25	7.50 - 8.25	22.2



BI851

► HIGHWAY SERVICE

- Drive axle tire designed for on-road use.
- Outstanding traction performance.
- Excellent mileage and enhanced rolling resistance.



BI851

Rim (inch)	Aspect ratio (%)	Tire Size	Ply Rating	Load Index	Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
22.5	80	295 /80 R22.5		152/148	M	TL	○	FALKEN	1063	308	9.00	8.25 - 9.00	21.0
		315 /80 R22.5	18	156/150(154/150)	L(M)	TL	○	FALKEN	1085	314	9.00	9.00 - 9.75	21.3
17.5	75	205 /75 R17.5	14	124/122	M	TL	○	FALKEN	764	203	6.00	5.25 - 6.75	14.1
		215 /75 R17.5	14	126/124	M	TL	○	FALKEN	776	212	6.00	6.00 - 6.75	14.6
		225 /75 R17.5	14	129/122	M	TL	○	FALKEN	789	231	6.75	6.00 - 6.75	14.9
		235 /75 R17.5	16	132/130	M	TL	○	FALKEN	805	237	6.75	6.75 - 7.50	15.3

BI-852

New

► HIGHWAY SERVICE

- Designed to provide long mileage and excellent traction on paved road surface.
- Prevents Heel & Toe wear generation (Minimize irregular wear)
- Low cut chipping damage on tread surface
- Less stone trapping when used on rough surface.



BI852

Rim (inch)	Aspect ratio (%)	Tire Size	Ply Rating	Load Index	Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
22.5		11 R22.5	16	148/145	L	TL	○	FALKEN	1067	281	8.25	7.50 - 8.25	22.2
		12 R22.5	16	152/148	M	TL	○	FALKEN	1096	306	9.00	8.25 - 9.00	22.5
80		315 /70 R22.5	18	154/150(152/148)	L(M)	TL	○	FALKEN	1032	313	9.00	9.00 - 9.75	22.0
		275 /80 R22.5	16	149/146	L	TL	○	FALKEN	1030	285	8.25	7.50 - 8.25	21.4
		295 /80 R22.5	16	152/148	M	TL	○	FALKEN	1066	306	9.00	8.25 - 9.00	21.4
		315 /80 R22.5	18	156/150(154/150)	L(M)	TL	○	FALKEN	1093	315	9.00	9.00 - 9.75	23.0
17.5	75	215 /75 R17.5	14	126/124	M	TL	○	FALKEN	775	216	6.00	6.00 - 6.75	14.6
		235 /75 R17.5	16	132/130	M	TL	○	FALKEN	803	239	6.75	6.75 - 7.50	15.3

BI-867

► HIGHWAY SERVICE

- Extra-high traction tread design.
- Excellent stability in wet and dry conditions.
- Deep tread designed for extra-long service life.



BI867

Rim (inch)	Aspect ratio (%)	Tire Size	Ply Rating	Load Index	Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
22.5	80	12 R22.5		152/148	L	TL	○	FALKEN	1084	304	9.00	8.25 - 9.00	19.7
		295 /80 R22.5		152/148	M	TL	○	FALKEN	1059	301	9.00	8.25 - 9.00	19.7
		315 /80 R22.5		154/150	M	TL	○	FALKEN	1086	309	9.00	9.00 - 9.75	20.5
17.5	75	*215 /75 R17.5		126/124	M	TL	○	FALKEN	775	214	6.00	6.00 - 6.75	14.7

*=5rib

RI-188

► HIGHWAY SERVICE

- Rib pattern designed for steering performance and trailer axle highway use.
- Excellent wear resistance, durability and handling at high speed.
- Excellent stability on wet surfaces.



RI-188

Rim (inch)	Aspect ratio (%)	Tire Size	Ply Rating	Load Index	Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
22.5		12R 22.5	16	152/148	M	TL	○	FALKEN	1074	299	9.00	8.25 - 9.00	14.8

*New*

RI190

- An all position tire designed for city bus.
- Achieves high durability performance by adopting 4D Nano design technology.
- Adopting a new profile enhances irregular wear resistance.

**RI190**

Rim (inch)	Aspect ratio (%)	Tire Size	Ply Rating	Load Index	Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
22.5	70	275 /70 R22.5	16	150/148 (152/148)	J(E)	TL	○	FALKEN	970	280	8.25	7.50 - 8.25	20.1
	80	295 /80 R22.5		152/148	J	TL	○	FALKEN	Under Development				

GI-307

► ON-AND-OFF ROAD SERVICE

- All-round tire designed for on and limited off - road use.
- Tough materials with cut resistance.
- Excellent durability in tough road conditions.
- Improved tread compound reduces heat build-up.

**GI-307**

Rim (inch)	Aspect ratio (%)	Tire Size	Ply Rating	Load Index	Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
24		*12.00R 24	18	156/153	K	TT	○	FALKEN	1215	317	8.50	8.00 - 9.00	15.8
22.5	80	315 /80R 22.5		156/150	K	TL	○	FALKEN	1074	309	9.00	9.00 - 9.75	17.8
		13R 22.5		154/150 (156/150)	K(G)	TL	○	FALKEN	1124	311	9.75	9.00 - 9.75	17.8

*:GI307EX

GI-327

► HIGHWAY SERVICE

- Tough materials provide cut resistance.
- Excellent durability in tough road conditions.
- Uses Tread compound for less heat build up.

GI-327



Rim (inch)	Aspect ratio (%)	Tire Size		Ply Rating	Load Index	Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
												Measuring	Approved	
22.5	90	11R	22.5	16	148/145	L	TL	○	OHTSU	1053	270	8.25	7.50 - 8.25	16.2
17.5		225/90R	17.5		127/125	L	TL		OHTSU	863	228	6.75	6.00 - 6.75	15.5
16		8.25R	16	14			TT		OHTSU	857	233	6.50	6.00 - 6.50	15.5

GI378

► HIGHWAY SERVICE

- The GI378 provides an exceptional balance of on-road stability and off-road traction. On the road, the specially designed tread pattern provides optimal traction and handling while the wide outer ribs provide stability even under heavy loads. Off the road, the stone drilling prevention features keep debris from penetrating the casing.
- Up to 20-ply rated for extra load carrying capacity, the GI378 is cost-effective solution for on and off-road service.

GI378



Rim (inch)	Aspect ratio (%)	Tire Size		Ply Rating	Load Index	Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
												Measuring	Approved	
22.5	65	385 /65R	22.5	18	158	K	TL	○	FALKEN	1076	375	11.75	11.75 - 12.25	15.9
		425 /65R	22.5	20	165	K	TL	○	FALKEN	1126	418	12.25	12.25 - 13.00	15.9
		445 /65R	22.5	20	168	K	TL	○	FALKEN	1152	448	13.00	13.00 - 14.00	15.9

MI-527

► HIGHWAY SERVICE

- Developed for all-season performance.
- Can be used in snowy road conditions.
- Excellent stability & wet traction.
- Enhanced resistance to irregular wear.

MI-527



Rim (inch)	Aspect ratio (%)	Tire Size		Ply Rating	Load Index	Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
												Measuring	Approved	
22.5	70	275 /70R	22.5	14	148/145	L	TL	○	OHTSU	965	275	8.25	7.50 - 8.25	16.8

R1200

► HIGHWAY SERVICE

- Rib pattern for highway driving, designed for all position fitments.
- Enhanced middle-distance performance.
- Excellent steering response at high speed.
- Outstanding performance and stability in wet conditions.



R1200

Rim (inch)	Aspect ratio (%)	Tire Size	Ply Rating	Load Index	Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
22.5		11R 22.5	16	148/145	M	TL	○	OHTSU	1055	280	8.25	7.50 - 8.25	14.8
		*12R 22.5	16	152/148	M	TL	○	OHTSU	1085	299	8.25	8.25	14.9
20		9.00R 20	14	140/137	K	TT	○	OHTSU	1016	258	7.00	6.50 - 7.50	13.8
		10.00R 20	16	146/143	K	TT	○	OHTSU	1055	279	7.50	7.00 - 8.00	14.8
		11.00R 20	16	150/146	K	TT	○	OHTSU	1084	285	8.00	7.50 - 8.50	14.8

*:R1200D

R3500

► HIGHWAY SERVICE

- Rib/lug pattern for highway driving, designed for all position use.
- Excellent traction in wet conditions.
- Longer mileage, and enhanced resistance against irregular wear.



Rim (inch)	Aspect ratio (%)	Tire Size	Ply Rating	Load Index	Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
22.5		10R 22.5	14	140/137	K	TL	○	OHTSU	1021	249	7.50	6.75 - 7.50	16.4
20		9.00R 20	14	139/137	K	TT		OHTSU	1020	258	7.00	6.50 - 7.50	16.4

RI-129

► ON-AND-OFF ROAD SERVICE

- All position tire with special tread compound to ensure good performance in the regional application.



RI-129

Rim (inch)	Aspect ratio (%)	Tire Size	Ply Rating	Load Index	Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
24	95	12.00R 24		160/156	K	TT		FALKEN	1214	319	8.50	8.00 - 9.00	14.8
		325 /95R 24		162/160	K	TL(TT)		FALKEN	1220	318	8.25	7.50 - 9.00	16.7
22.5	80	315 /80R 22.5		154/150	M	TL	○	FALKEN	1078	313	9.00	9.00 - 9.75	16.6
		12.00R 20		154/150	K	TT	○	FALKEN	1118	321	8.50	7.50 - 9.00	14.8

R3100

► ON-AND-OFF ROAD SERVICE

- Rib/lug pattern for on and limited off road conditions. Designed for all-position use.
- Excellent traction performance.
- Enhanced resistance to cutting and chipping.



Rim (inch)	Aspect ratio (%)	Tire Size	Ply Rating	Load Index	Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
20		12.00R 20	18	154/149	K	TT	○	OHTSU	1123	307	8.50	8.00 - 9.00	16.2

GI-337

► ON-AND-OFF ROAD SERVICE

- Rib/lug pattern for highway driving, designed for all-position use.
- Excellent traction performance.
- Longer mileage, and enhanced resistance to irregular wear.



GI-337

Rim (inch)	Aspect ratio (%)	Tire Size	Ply Rating	Load Index	Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
20		10.00R 20	16	147/143	K	TT	○	OHTSU	1055	279	7.50	7.00 - 8.00	16.9

GI-347

► ON-AND-OFF ROAD SERVICE

- Rib/lug pattern for on-and off-road conditions, designed for all-position use.
- Excellent traction performance.
- Longer mileage, and enhanced resistance against irregular wear.
- Excellent durability in tough road conditions.
- Uses improved tread compound for less heat build up.



GI-347

Rim (inch)	Aspect ratio (%)	Tire Size	Ply Rating	Load Index	Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
22.5		12R 22.5	16	152/148	K	TL	○	OHTSU	1093	296	9.00	8.25 - 9.00	17.5
20		11.00R 20	16	150/146	K	TT	○	OHTSU	1093	291	8.00	7.50 - 8.50	17.5



GI388

► ON-AND-OFF ROAD SERVICE

- The GI388 is specifically designed for heavy load applications such as waste haulers and sanitation vehicles.
- Well-suited for both on and off-highway use, the GI388 comes equipped with casing protection features, long mileage capability, and a cut and chip resistance compound.
- The advanced tread compound resists the effects of tread chipping in high-scurf applications, lowering maintenance costs.

GI388



Rim (inch)	Aspect ratio (%)	Tire Size		Ply Rating	Load Index	Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
												Measuring	Approved	
24.5	95	11R 24.5	16	149/146	K	TL			FALKEN	1119	287	8.25	7.50 - 8.25	20.6
24		12.00R 24	20	160/156	K	TT		○	FALKEN	1222	315	8.50	8.00 - 9.00	16.7
		325/95R 24		162/160	K	TL(TT)		○	FALKEN	1222	315	8.25	7.50 - 9.00	16.7
22.5	70	11R 22.5	16	148/145	K	TL		○	FALKEN	1063	286	8.25	7.50 - 8.25	20.6
		12R 22.5	16	152/148	K	TL		○	FALKEN	1092	299	9.00	8.25 - 9.00	18.3
		13R 22.5		156/150(154/150)	K(L)	TL		○	FALKEN	1126	314	9.00	9.00 - 9.75	17.8
	80	275/70R 22.5		148/145	K	TL		○	FALKEN	973	281	8.25	7.50 - 8.25	18.0
		295/80R 22.5		152/148	K	TL		○	FALKEN	1060	303	9.00	8.25 - 9.00	18.8
		315/80R 22.5	20	156/150	K	TL		○	FALKEN	1083	312	9.00	9.00 - 9.75	19.1
20	70	12.00R 20	18	154/150	K	TT		○	FALKEN	1122	313	8.50	8.00 - 9.00	16.7
19.5		265/70R 19.5		143/141	J	TL		○	FALKEN	878	256	7.50	7.50 - 8.25RW	14.7
17.5		225/80R 17.5		123/122	L	TL		○	FALKEN	808	221	8.25	7.50 - 9.00	13.2
16	80	7.50R 16	14	123/121	L	TT		○	FALKEN	809	215	6.00	5.50 - 7.00	13.2

LI-257

► OFF ROAD SERVICE

- The LI-257 is a rugged tire with an aggressive tread design built for maximum traction on and off-road.
- The LI-257 uses a fatigue resistant construction to ensure high performance in logging, mining and construction industries.
- The cut and chip resistant tread compound is flexible to help withstand puncture even on the roughest terrain.

LI-257



Rim (inch)	Aspect ratio (%)	Tire Size		Ply Rating	Load Index	Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
												Measuring	Approved	
22.5	80	12R 22.5			152/148	K	TL	○	FALKEN	1097	304	9.00	8.25 - 9.00	19.7
		13R 22.5			154/150(156/150)	K(G)	TL	○	FALKEN	1128	322	9.75	9.00 - 9.75	20.0
		315 /80R 22.5			156/150	K	TL	○	FALKEN	1088	315	9.00	9.00 - 9.75	21.3

SINCERA SN831



TIRE SIZE	CAR MODEL	OEM	TIRE CATEGORY
165/70R14 81S	MICRA	NISSAN	PC

SINCERA SN832A ECORUN



TIRE SIZE	CAR MODEL	OEM	TIRE CATEGORY
165/70R14 81T	UP!	VOLKSWAGEN	PC
185/65R15 88H	POLO	VOLKSWAGEN	PC
185/70R14 88H	POLO	VOLKSWAGEN	PC

ZIEX CT50 A/S



TIRE SIZE	CAR MODEL	OEM	TIRE CATEGORY
P255/50R20 104V	CX-9	MAZDA	PC

ZIEX ZE001 A/S



TIRE SIZE	CAR MODEL	OEM	TIRE CATEGORY
225/55R18 98H	CROSSTREK / FORESTER	SUBARU	PC
225/60R18 100H	X-TRAIL	NISSAN	PC

ZIEX ZE914A ECORUN



TIRE SIZE	CAR MODEL	OEM	TIRE CATEGORY
195/55R16 91V XL	POLO	VOLKSWAGEN	PC
205/60R16 96V XL	TOURAN	VOLKSWAGEN	PC
215/55R17 94V	ATECA	VOLKSWAGEN	PC
215/55R17 94W	SUPERB	SKODA	PC
215/60R16 95V	ALTIMA	NISSAN	PC
	PASSAT	VOLKSWAGEN	PC
215/65R17 99V	Q3	AUDI	PC
	TIGUAN LWB	VOLKSWAGEN	PC
225/55R17 97V	ATECA	VOLKSWAGEN	PC
225/60R17 99H	JEEP COMPASS	FIAT CHRYSLER	PC

EUROALL SEASON AS210A



TIRE SIZE	CAR MODEL	OEM	TIRE CATEGORY
265/60R18 110V	MERCEDES-BENZ G-CLASS	DAIMLER	PC

AZENIS FK510A SUV



TIRE SIZE	CAR MODEL	OEM	TIRE CATEGORY
235/60R18 103W	MACAN	PORSCHE	PC
255/55R18 105W	MACAN	PORSCHE	PC

AZENIS FK453



TIRE SIZE	CAR MODEL	OEM	TIRE CATEGORY
215/45R17 91W XL	POLO	VOLKSWAGEN	PC

AZENIS FK453CC



TIRE SIZE	CAR MODEL	OEM	TIRE CATEGORY
215/50R18 92W	ATECA	VOLKSWAGEN	PC
235/55R19 101V	INFINITI QX50	NISSAN	PC

WILDPEAK H/T HT01A



TIRE SIZE	CAR MODEL	OEM	TIRE CATEGORY
225/60R17 99T	JEEP COMPASS	FIAT CHRYSLER	PC

WILDPEAK A/T AT3WA



TIRE SIZE	CAR MODEL	OEM	TIRE CATEGORY
265/60R18 110H	Mercedes-Benz G-Class	DAIMLER	PC
L275/65R18 113S	Ram 1500	FIAT CHRYSLER	LT

FALKEN

OE Information by OEM

NISSAN

ALTIMA

TIRE PATTERN	TIRE SIZE	TIRE CATEGORY
ZIEX ZE914A ECORUN	215/60R16 95V	PC

INFINITI QX50

TIRE PATTERN	TIRE SIZE	TIRE CATEGORY
AZENIS FK453CC	235/55R19 101V	PC

X-TRAIL

TIRE PATTERN	TIRE SIZE	TIRE CATEGORY
ZIEX ZE001 A/S	225/60R18 100H	PC

SUBARU

CROSSTREK

TIRE PATTERN	TIRE SIZE	TIRE CATEGORY
ZIEX ZE001 A/S	225/55R18 98H	PC

FORESTER

TIRE PATTERN	TIRE SIZE	TIRE CATEGORY
ZIEX ZE001 A/S	225/55R18 98H	PC

MAZDA

CX-9

TIRE PATTERN	TIRE SIZE	TIRE CATEGORY
ZIEX CT50 A/S	255/50R20 105V	PC
	P255/50R20 104V	PC

DAIMLER

MERCEDES-BENZ G-CLASS

TIRE PATTERN	TIRE SIZE	TIRE CATEGORY
EUROALL SEASON AS210A	265/60R18 110V	PC
WILDPEAK A/T AT3WA	265/60R18 110H	PC

FIAT CHRYSLER

JEEP COMPASS

TIRE PATTERN	TIRE SIZE	TIRE CATEGORY
WILDPEAK H/T HT01A	225/60R17 99T	PC
ZIEX ZE914A ECORUN	225/60R17 99H	PC

RAM 1500

TIRE PATTERN	TIRE SIZE	TIRE CATEGORY
WILDPEAK A/T AT3WA	L275/65R18 113S	LT

VOLKSWAGEN

ATECA

TIRE PATTERN	TIRE SIZE	TIRE CATEGORY
AZENIS FK453CC	215/50R18 92W	PC
ZIEX ZE914A ECORUN	215/55R17 94V	PC
	225/55R17 97V	PC

PASSAT

TIRE PATTERN	TIRE SIZE	TIRE CATEGORY
ZIEX ZE914A ECORUN	215/60R16 95V	PC

POLO

TIRE PATTERN	TIRE SIZE	TIRE CATEGORY
AZENIS FK453	215/45R17 91W XL	PC
SINCERA SN832A ECORUN	185/65R15 88H	PC
	185/70R14 88H	PC
ZIEX ZE914A ECORUN	195/55R16 91V XL	PC
AZENIS FK453	215/45R17 91W XL	PC
SINCERA SN832A ECORUN	185/70R14 88H	PC
ZIEX ZE914A ECORUN	195/55R16 91V XL	PC

TIGUAN LWB

TIRE PATTERN	TIRE SIZE	TIRE CATEGORY
ZIEX ZE914A ECORUN	215/65R17 99V	PC

TOURAN

TIRE PATTERN	TIRE SIZE	TIRE CATEGORY
ZIEX ZE914A ECORUN	205/60R16 96V XL	PC

UP!

TIRE PATTERN	TIRE SIZE	TIRE CATEGORY
SINCERA SN832A ECORUN	165/70R14 81T	PC

AUDI

Q3

TIRE PATTERN	TIRE SIZE	TIRE CATEGORY
ZIEX ZE914A ECORUN	215/65R17 99V	PC

PORSCHE

MACAN

TIRE PATTERN	TIRE SIZE	TIRE CATEGORY
AZENIS FK510A SUV	235/60R18 103W	PC
	255/55R18 105W	PC


FALKEN

SAFETY INFORMATION

1. ⚠ SAFETY WARNING

Any tire, no matter how well constructed, may fail in use as a result of punctures, impact damage, improper inflation, overloading, excessive wear or other use conditions. A tire is wear-sensitive and all tires eventually wear out. A worn or damaged tire can present a safety hazard, and a tire failure can lead to an accident that may result in property damage, injuries or death. To reduce the risk of tire failure we advise as follows:

- Check the air pressure in all your tires (including the spare) at least monthly and before long trips & when tires are cool (when your vehicle has been driven less than one mile or after being stopped for at least one hour).
Don't reduce air pressure when tires are hot from driving. Use a good quality, accurate tire gauge to check air pressure and maintain air pressure at the level recommended by the vehicle manufacturer.
- Never overload your tires.
- The maximum load-carrying capability of your tires is molded on the sidewall of each tire.
- Check your tires regularly for scrapes, bulges, separations, cuts, snags or embedded foreign objects. See your FALKEN store or dealer immediately if any such condition is discovered.
- Never operate your vehicle in excess of lawful speeds, beyond maximum speeds determined by driving conditions or at speeds greater than recommended for the tire you are using.
- Make every effort to avoid driving over objects that may damage the tire through impact or cutting, such as potholes, glass, metal, etc.
- Never drive on bald tires. Always remove tires from service and replace them when (1.6 mm) tread depth remains on the tire. Tread wear indicators are built into the tires to indicate when they are worn to (1.6 mm). In most countries, it is illegal to drive with tires with less than (1.6 mm) of tread remaining.
- Don't spin tires excessively on mud, snow, ice, etc. as this can cause tire explosion or disintegration, as well as axle failure.
- Always follow the instructions and recommendations of the vehicle manufacturer, as contained in the vehicle Owner's Manual.
- IMPORTANT INFORMATION is molded on the tire sidewall. The sidewall information includes the type, size, load Index, rotation, maximum load and maximum pressure for that particular tire. Remember that the vehicle manufacturer, not the tire manufacturer, determines the correct inflation pressure for the tires on vehicle.

2. RECOMMENDATIONS ON TIRE STORAGE

- To avoid deterioration and discoloration, storage time must be minimized. Always follow the principle of "First In, First Out."
- Tires must be stored in clean conditions, free from exposure to sunlight or strong artificial light, heat, ozone and hydrocarbons.
- The storage area should be cool (preferably below 25°C), dry and moderately ventilated. Moist conditions should be avoided.
- Tires should be stored in a relaxed condition free from tension, compression or other deformation, since these may cause cracking or permanent distortion.

CORPORATE DATA

GUIDE TO PROVING GROUNDS

Sumitomo Rubber's tire proving grounds in Okayama, Asahikawa, Nayoro and Huntsville, USA support tire development through severe tests conducted in many kinds of roads of the world and in various driving conditions.

OKAYAMA

This facility merges the Roads of the World, in one location. Sumitomo Rubber's Okayama Proving Ground reproduces the world's roads and a wide variety of driving conditions. The expansive site, with a total area of 1,000,000 square meters, is fully equipped with a 3,200meter main circuit, a handling stability test track, wet roads, a noise and vibration test track, and tire noise evaluation devices, among many others. To provide drivers around the world with greater safety and comfort, the site plays an invaluable role in the research and development of high-performance tires that boast superior handling and refined comfort, and next generation tires including run-flat tires, electric car tires and ultra-lightweight tires.



ASAHIKAWA High Quality winter tires are born here - Sumitomo Rubber Asahikawa Proving Ground

Asahikawa Proving Ground, specially designed for winter testing, is located in the city of Asahikawa in Hokkaido and boasts a total area of 210,000 square meters. The facility includes a 1,400meter main circuit and a variety of ice and packed snow surfaces, making it an important base of research and development for winter tires.



NAYORO Winter Tire Special Evaluation Center - Sumitomo Rubber Nayoro Proving Ground

Nayoro Proving Ground, specially designed for winter testing, is located in the city of Nayoro in Hokkaido, and boasts a total area of 870,000 square meters. The facility includes a 2,200meter main circuit, and variety of ice and packed snow surfaces, making this an important base of research and development for winter tires.





OVERSEAS OFFICES



Falken Tire Europe GmbH

Berliner Strasse 74-76
63065 Offenbach am Main/Germany
TEL: +49-69-247-5252-10
FAX: +49-69-247-5252-11

Sumitomo Rubber Asia (Tire) PTE. LTD.

1 Maritime Square #09-39 Harbourfront Centre
Singapore 099253, Singapore
TEL: +65-6278-6975
FAX: +65-6278-4049

Sumitomo Rubber Middle East FZE

Office No. 5WA 11B, Dubai Airport Free Zone
P. O. Box 54901, Dubai, UAE
TEL: +971-4-214-6959
FAX: +971-4-214-6960

Sumitomo Rubber Latin America Limitada

Avenida Nueva Tajamar N° 183 Of. 601,
Las Condes, Santiago, Chile
TEL: +56-2-2901-5400

Sumitomo Rubber Middle East Jeddah office

c/o BINZAGR COMPANY P. O. Box 54,
Jeddah 21411, KSA
TEL: +966-2-663-7327
FAX: +966-2-663-5522

Falken Tire India Private Limited

Unit No. 312, 4th Floor, Centrum Plaza, Golf Course Road,
Sector 53, Gurgaon 122002, Haryana, India
TEL: +91-124-463-8989

Sumitomo Rubber North America, Inc.

8656 Haven Ave., Rancho Cucamonga, CA
91730 USA
TEL: +1-909-466-1116
FAX: +1-909-466-1169

Sumitomo Rubber Australia Pty. Ltd.

32 Riverside Road, Chipping Norton NSW
2170 Australia.
TEL: +61-2-8774-2905
FAX: +61-2-9755-4599



 **SUMITOMO RUBBER INDUSTRIES, LTD.**

Toyosu Center Building, 3-3, 3-chome, Toyosu, Koto-ku, Tokyo 135-6005, Japan
TEL:+81-3-5546-0126 FAX:+81-3-5546-0146